

Pipe Clamps

B2400 - Standard Pipe Strap

Size Range: 1/2" (15mm) thru 24" (600mm) pipe

Material: Steel


Function: Designed for supporting pipe runs from strut supports.

Approvals: Underwriters Laboratories Listed for B2400-3/4" thru B2400-8" for Design Load 1 only. Conforms to Federal Specification WW-H-171E & A-A-1192A, Type 26 and Manufacturers Standardization Society ANSI/MSS SP-69 & SP-58, Type 26.

Finish: Electro-Galvanized. Contact customer service for alternative finishes and materials.

Order By: Part number, pipe size and finish


Note: Ductile iron sizes available.
Special "B" dimensions available on request, consult factory.

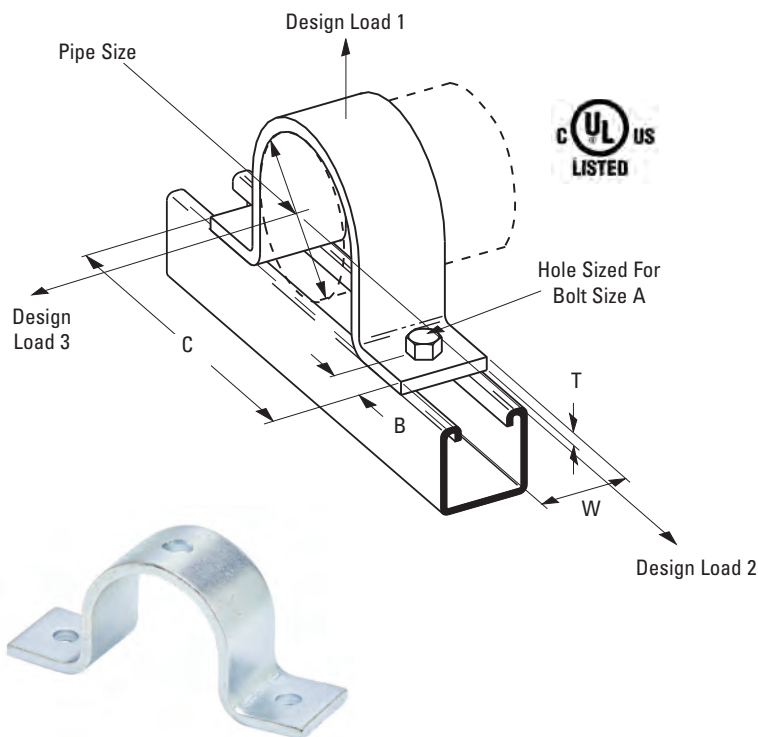

Part No.	Pipe Size in. (mm)	Bolt Size A	B in. (mm)	C in. (mm)	T in. (mm)	W in. (mm)
B2400-1/2	1/2" (15)	1/4"	7/16" (11.1)	2 ¹³ /16" (71.4)	10 Ga. (3.4)	1 ⁵ /8" (41.3)
B2400-3/4	3/4" (20)	1/4"	7/16" (11.1)	3" (76.2)	10 Ga. (3.4)	1 ⁵ /8" (41.3)
B2400-1	1" (25)	1/4"	7/16" (11.1)	3 ¹⁷ /32" (89.7)	10 Ga. (3.4)	1 ⁵ /8" (41.3)
B2400-1 1/4	1 1/4" (32)	1/4"	7/16" (11.1)	3 ³ /4" (95.2)	10 Ga. (3.4)	1 ⁵ /8" (41.3)
B2400-1 1/2	1 1/2" (40)	1/4"	7/16" (11.1)	4 ¹ /16" (103.2)	10 Ga. (3.4)	1 ⁵ /8" (41.3)
B2400-2	2" (50)	3/8"	1 ¹ /16" (17.4)	5 ²¹ /32" (143.6)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-2 1/2	2 1/2" (65)	3/8"	1 ¹ /16" (17.4)	6 ⁵ /32" (156.3)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-3	3" (80)	3/8"	1 ¹ /16" (17.4)	6 ²⁵ /32" (172.2)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-3 1/2	3 1/2" (90)	3/8"	1 ¹ /16" (17.4)	7 ⁹ /32" (184.9)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-4	4" (100)	1/2"	1 ¹ /16" (17.4)	7 ²⁵ /32" (197.6)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-5	5" (125)	1/2"	1 ¹ /16" (17.4)	8 ⁷ /8" (225.4)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-6	6" (150)	1/2"	1 ¹ /16" (17.4)	9 ¹⁵ /16" (252.4)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-8	8" (200)	1/2"	1 ¹ /16" (17.4)	11 ³¹ /32" (304.0)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-10	10" (250)	1/2"	1 ¹ /16" (17.4)	14" (355.6)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-12	12" (300)	1/2"	1 ¹ /16" (17.4)	16" (406.4)	1/4" (6.3)	1 ⁵ /8" (41.3)
B2400-14	14" (350)	7/8"	1 ⁵ /16" (33.3)	20 ³ /8" (517.5)	3/8" (9.5)	1 ³ /4" (44.4)
B2400-16	16" (400)	7/8"	1 ⁵ /16" (33.3)	22 ³ /8" (568.3)	3/8" (9.5)	1 ³ /4" (44.4)
B2400-18	18" (450)	7/8"	1 ⁵ /16" (33.3)	26 ¹ /8" (663.6)	1/2" (12.7)	1 ³ /4" (44.4)
B2400-20	20" (500)	7/8"	1 ⁵ /16" (33.3)	28 ¹ /8" (714.4)	1/2" (12.7)	1 ³ /4" (44.4)
B2400-24	24" (600)	7/8"	1 ⁵ /16" (33.3)	32 ¹ /8" (816.0)	1/2" (12.7)	1 ³ /4" (44.4)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.

B2400 - Standard Pipe Strap cont.

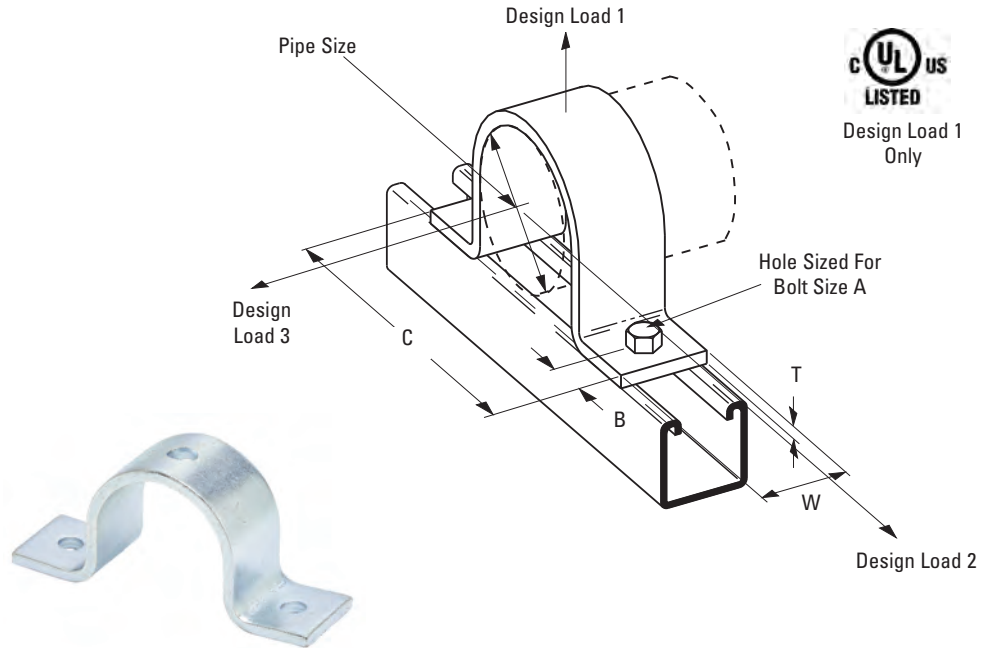

Part No.	Design Load 1		Design Load 2		Design Load 3		Approx. Wt./100	
	Lbs.	(kN)	Lbs.	(kN)	Lbs.	(kN)	Lbs.	(kg)
B2400-1/2	600	(2.67)	150	(.67)	105	(.47)	23	(10.4)
B2400-3/4	600	(2.67)	150	(.67)	105	(.47)	26	(11.8)
B2400-1	600	(2.67)	150	(.67)	120	(.53)	31	(14.0)
B2400-1 1/4	600	(2.67)	150	(.67)	120	(.53)	36	(16.3)
B2400-1 1/2	600	(2.67)	150	(.67)	120	(.53)	39	(17.7)
B2400-2	1200	(5.34)	480	(2.14)	180	(.80)	93	(42.2)
B2400-2 1/2	1200	(5.34)	480	(2.14)	180	(.80)	106	(48.1)
B2400-3	1200	(5.34)	480	(2.14)	300	(1.33)	132	(59.9)
B2400-3 1/2	1200	(5.34)	480	(2.14)	300	(1.33)	151	(68.5)
B2400-4	1500	(6.67)	600	(2.67)	450	(2.00)	160	(72.6)
B2400-5	1500	(6.67)	600	(2.67)	450	(2.00)	192	(87.1)
B2400-6	1500	(6.67)	600	(2.67)	450	(2.00)	219	(99.3)
B2400-8	2000	(8.90)	800	(3.56)	600	(2.67)	297	(134.7)
B2400-10	2000	(8.90)	800	(3.56)	600	(2.67)	465	(210.9)
B2400-12	2000	(8.90)	800	(3.56)	600	(2.67)	560	(254.0)
B2400-14	2000	(8.90)	800	(3.56)	600	(2.67)	761	(345.2)
B2400-16	2000	(8.90)	800	(3.56)	600	(2.67)	861	(390.5)
B2400-18	2000	(8.90)	800	(3.56)	600	(2.67)	1297	(588.3)
B2400-20	2000	(8.90)	800	(3.56)	600	(2.67)	1426	(646.8)
B2400-24	2000	(8.90)	800	(3.56)	600	(2.67)	1682	(762.9)

All dimensions in charts and on drawings are in inches. Dimensions shown in parentheses are in millimeters unless otherwise specified.