


DEVICES & WALL PLATES

Color Selection Chart

Devices & Plastic Wall Plate Colors

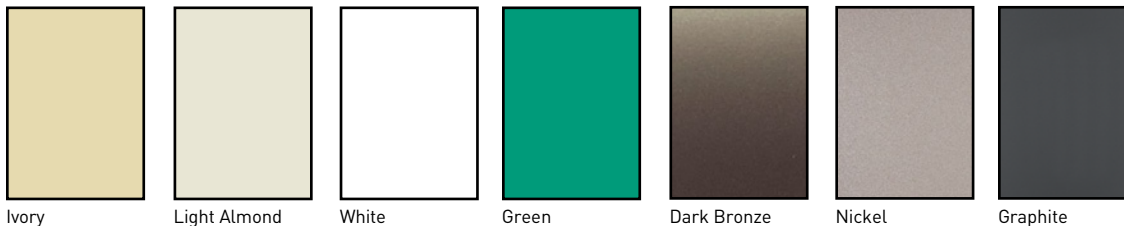

Ivory

Light Almond


White

Green

Dark Bronze

Nickel

Graphite

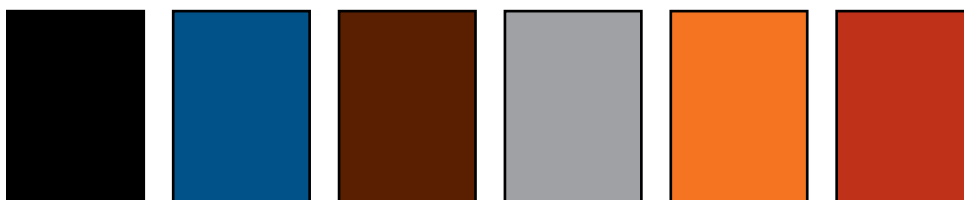

Black

Blue

Brown

Gray

Orange

Red

See specific device and wall plate catalog charts for particular color availabilities.

Metal Wall Plates

Metal Finish



Aluminum


Polished Brass

Stainless Steel

Chrome

Custom Metal Wall Plates Paint Finish Colors

Paint Color

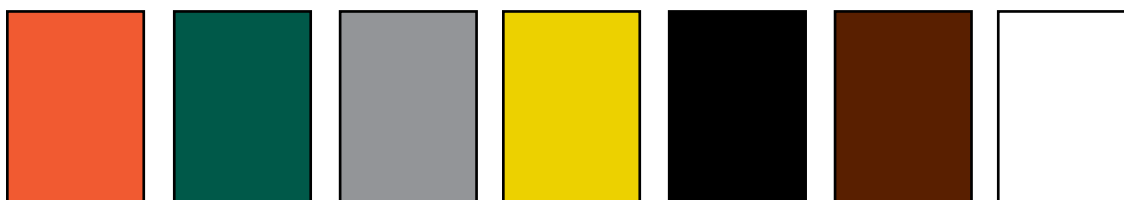

Orange

Green


Gray

Yellow

Glossy Black

Brown

White

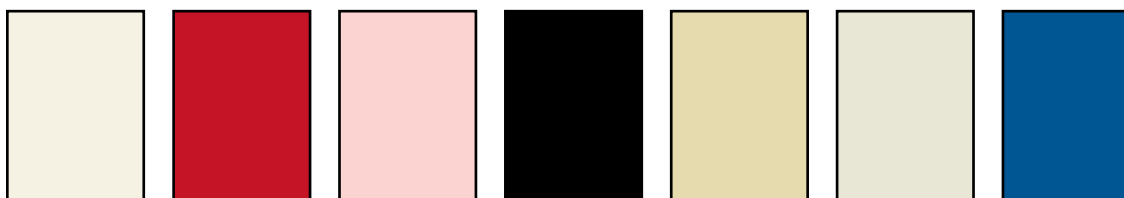

Primer

Red

Pink

Flat Black

Ivory

Light Almond


Blue

To order custom metal wall plates, see Pages I-25—I-29.

For additional colors consult factory.

COMMERCIAL GRADE RECEPTACLES

Hard Use Specification Grade Tamper-Resistant Receptacles 15 & 20A, 125V

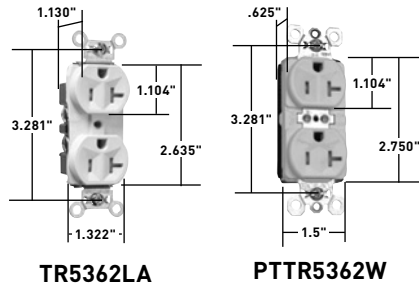

Features



- Dual mechanical shutter system to help prevent insertion of foreign objects.
- Auto-ground clip assures positive ground.
- Easily accessed break-off line-contact connecting tab for fast and easy split-circuit wiring.
- Backed-out tri-drive brass terminal screws for faster installation. Internal screw-pressure-plate back and side wire capability. Two back wire holes for additional wiring flexibility.
- Corrosion-resistant plated steel strap is locked in to face and back body to resist pulling away from the face/body assembly.
- .032 inch thick brass triple-wipe power contacts.

- Two drive screws anchor steel strap to back body and face where abrupt removal torque is greatest.

PlugTail® Features Only

- .036 inch thick, brass, triple-wipe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.

- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	V.			 UL498	FSUL WC596	 C22.2 No. 42
TAMPER-RESISTANT HARD USE DUPLEX RECEPTACLES								
TR5262I	PTTR5262I	15	125	Ivory	5-15R	•	•	•
TR5262W	PTTR5262W	15	125	White	5-15R	•	•	•
TR5262	PTTR5262	15	125	Brown	5-15R	•	•	•
TR5262GRY	PTTR5262GRY	15	125	Gray	5-15R	•	•	•
TR5262BK	PTTR5262RED	15	125	Black	5-15R	•	•	•
TR5262RED		15	125	Red	5-15R	•	•	•
TR5262BL		15	125	Blue	5-15R	•	•	•
TR5262LA	PTTR5262LA	15	125	Light Almond	5-15R	•	•	•
TR5362I	PTTR5362I	20	125	Ivory	5-20R	•	•	•
TR5362W	PTTR5362W	20	125	White	5-20R	•	•	•
TR5362	PTTR5362	20	125	Brown	5-20R	•	•	•
TR5362GRY	PTTR5362GRY	20	125	Gray	5-20R	•	•	•
TR5362BK	PTTR5362BK	20	125	Black	5-20R	•	•	•
TR5362RED	PTTR5362LA	20	125	Red	5-20R	•	•	•
TR5362BL		20	125	Blue	5-20R	•	•	•
TR5362LA		20	125	Light Almond	5-20R	•	•	•

2 Pole, 3 Wire



For Bulk Packaging Solutions consult factory.