


RESIDENTIAL RECEPTACLES

Dust & Moisture Resistant & Clock Hanger Receptacles 15 & 20A, 125V

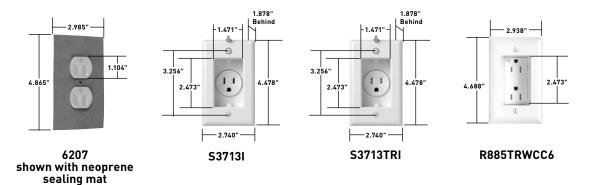

Features - Dust & Moisture Resistant

- Duplex receptacle has face backed by neoprene gasket which is slit to provide wiping action on plug blades and to provide positive closure when not in use.
- Cellular neoprene sealing mat fits under wall plate.

					3rd PARTY COMPLIANCE			
	RATING			NEMA	(h)	FSUL	® ₽-	
CATALOG NUMBER	A.	٧.	COLOR	CONFIG. NO.	UL498	WC596	C22.2 No. 42	
DUST & MOISTURE RESISTANT								
6207	15	125	Duplex, Dust and Moisture Resistant, Gray	5-15R	•	•	•	
6307	20	125	Duplex, Dust and Moisture Resistant, Gray	5-20R	•	•		
CR6307	20	125	Duplex, Corrosion, Dust and Moisture Resistant, Yellow	5-20R	•	•		

	RATING			NEMA	3rd PARTY COMPLIANCE		
					(II)	FSUL	SP.
CATALOG NUMBER	A.	٧.	COLOR	CONFIG. NO.	UL498	WC596	C22.2 No. 42
CLOCK HANGERS							
S3713I	15	125	Recessed Receptacle with Ivory Smooth Wall Plate	5-15R	•	•	•
S3713W	15	125	Recessed Receptacle with White Smooth Wall Plate	5-15R	•	•	•
S3713GRY	15	125	Recessed Receptacle with Gray Smooth Wall Plate	5-15R	•	•	•
S3713BK	15	125	Recessed Receptacle with Black Smooth Wall Plate	5-15R	•	•	•
S3713LA	15	125	Recessed Receptacle with Light Almond Smooth Wall Plate	5-15R	•	•	•
S3733SS	15	125	Recessed Receptacle with Stainless Steel Wall Plate	5-15R	•	•	•
S3733	15	125	Recessed Receptacle with Brass Wall Plate 5-15R •		•	•	•
TAMPER-RESISTANT CLOCK HANGERS BACK & SIDE WIRE							
S3713TRI	15	125	Recessed Receptacle with Ivory Smooth Wall Plate	5-15R	•	•	•
S3713TRW	15	125	Recessed Receptacle with White Smooth Wall Plate	5-15R	•	•	•
S3713TRGRY	15	125	Recessed Receptacle with Gray Smooth Wall Plate 5-15R •		•	•	
S3713TRBK	15	125	Recessed Receptacle with Black Smooth Wall Plate	5-15R	•	•	•
S3713TRLA	15	125	Recessed Receptacle with Light Almond Smooth Wall Plate	5-15R	•	•	•

	RATING			NEMA	3rd PARTY COMPLIANCE			
CATALOG NUMBER	A.	V.	COLOR	CONFIG. NO.	cULus			
RECESSED DUPLEX TAMPER-RESISTANT RECEPTACLE								
R885TRWCC6	15	125	White	5-15R	•			

2 Pole, 3 Wire



