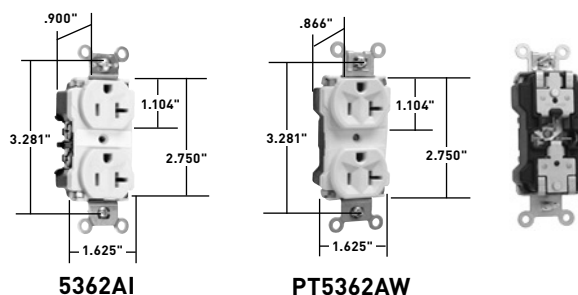


# INDUSTRIAL GRADE RECEPTACLES

## Industrial Extra Heavy-Duty Specification Grade Receptacles 15 & 20A, 125 & 250V





### Features


- One-piece brass mounting strap with integral ground.
- Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.
- Two drive screws anchor strap to back body and face.
- Exclusive patented feature, circuit label on face allows permanent circuit identification.
- .036 inch thick, brass, triple-ripe power contacts for lasting retention.
- Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.
- Impact-resistant nylon face and back body.
- Oversized #10 deep tri-drive head brass terminal and ground screws.
- Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.
- External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.
- Line terminals accept #14 – #10 AWG stranded or solid copper clad conductors.
- Auto-ground clip assures positive ground.
- Corrosion-resistant models have nickel-plated straps and contacts.
- Ultrasonically welded polycarbonate connector housing secures terminations and conductors in a UL Listed, finger safe housing.
- Large brass contacts snugly terminate on device blade terminals.
- Pre-stripped connector leads fasten to conductors, easier than standard pigtails.
- Auto-ground clip assures positive ground.
- **PlugTail devices** install up to 5 times faster than traditional.

### PlugTail® Features Only

- .036 inch thick, brass, triple-ripe power contacts for lasting retention.
- Plated steel wrap-around strap design for maximum durability and corrosion resistance.
- No exposed terminals create a finger safe application before, during, and after installation.
- Built-in connector features large brass terminal blades to ensure consistent, reliable electrical connections.
- Crimped and welded contacts.

CATALOG NUMBER	PLUGTAIL CATALOG NUMBER	RATING		COLOR	NEMA CONFIG. NO.	3rd PARTY COMPLIANCE		
		A.	V.			 UL498	FSUL WC596	 C22.2 No. 42
DUPLX RECEPTACLES								
5262AI	PT5262AI	15	125	Ivory	5-15R	•	•	•
5262AW	PT5262AW	15	125	White	5-15R	•	•	•
5262A	PT5262A	15	125	Brown	5-15R	•	•	•
5262AGRY	PT5262AGRY	15	125	Gray	5-15R	•	•	•
5262ARED		15	125	Red	5-15R	•	•	•
	PT5262ABK	15	125	Black	5-15R	•	•	•
5262ALA	PT5262ALA	15	125	Light Almond	5-15R	•	•	•
5362AI	PT5362AI	20	125	Ivory	5-20R	•	•	•
5362AW	PT5362AW	20	125	White	5-20R	•	•	•
5362A	PT5362A	20	125	Brown	5-20R	•	•	•
5362AGRY	PT5362AGRY	20	125	Gray	5-20R	•	•	•
5362ABK	PT5362ABK	20	125	Black	5-20R	•	•	•
5362ARED	PT5362ARED	20	125	Red	5-20R	•	•	•
5362ALA	PT5362ALA	20	125	Light Almond	5-20R	•	•	•
		20	125	Blue	5-20R	•	•	•
5662AI		15	250	Ivory	6-15R	•	•	•
5662AW		15	250	White	6-15R	•	•	•
5662A		15	250	Brown	6-15R	•	•	•
5662AGRY		15	250	Gray	6-15R	•	•	•
5662ABK		15	250	Black	6-15R	•	•	•
5662ARED		15	250	Red	6-15R	•	•	•
5862AI		20	250	Ivory	6-20R	•	•	•
5862AW		20	250	White	6-20R	•	•	•
5862A		20	250	Brown	6-20R	•	•	•
5862AGRY		20	250	Gray	6-20R	•	•	•
5862ABK		20	250	Black	6-20R	•	•	•
5862ARED		20	250	Red	6-20R	•	•	•
5862ALA		20	250	Light Almond	6-20R	•	•	•

### 2 Pole, 3 Wire



NEMA  
5-15R



NEMA  
5-20R



NEMA  
6-15R



NEMA  
6-20R