




Pass & Seymour

Straight Blade Receptacles Extra Heavy-Duty 15 & 20A, 125 & 250V

5262-A, CR6200, 5362-A, CR6300, 5662-A, 5862-A

Expressly designed for maximum durability.

With their extra-heavy brass straps locked into impact-resistant nylon faces and back bodies, these receptacles are ready for the toughest environments. They are available in corrosion-resistant versions, too, with nickel-plated straps and contacts. They install easily, thanks to external screw-pressure-plate back wiring for all terminals, including the ground.

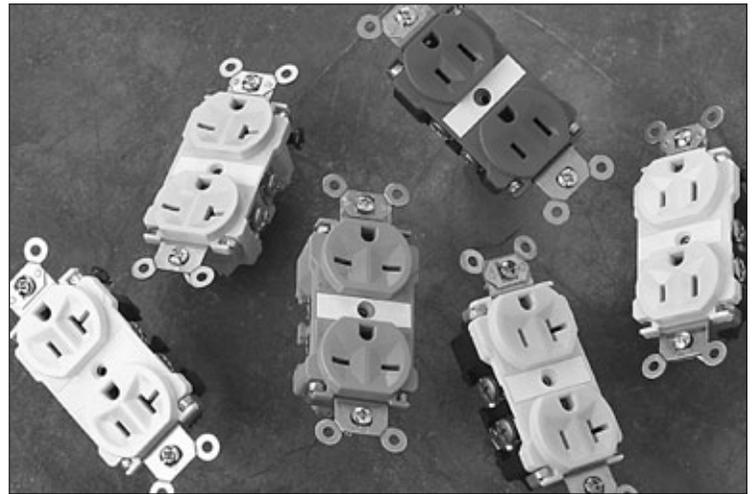

Features & Benefits

Auto-ground eliminates the necessity to terminate grounding conductor to device.

Strap tabs wrap around and lock down on face to prevent strap from separating from face and back body.

Extra heavy-duty, one-piece brass strap and integral ground for added strength and safety.

.036 inch thick, brass, triple-wipe power contacts for lasting retention.



Exclusive patented feature, circuit label on face allows permanent circuit identification.

Two drive screws anchor strap to back body and face where abrupt removal torque is strongest.

Exclusive patented feature, external screw-pressure-plate back wire clamp on ground terminal for faster, easier installation.

External screw-pressure-plate back wire clamps with #10 brass terminal screws for visual assurance of a good connection.

Easily accessed break-off, line-contact connecting tab for fast, easy split-circuit wiring.

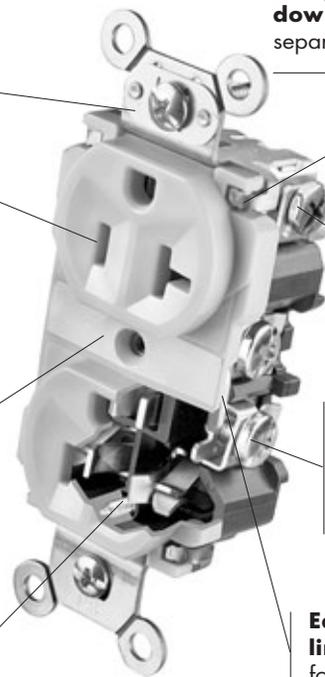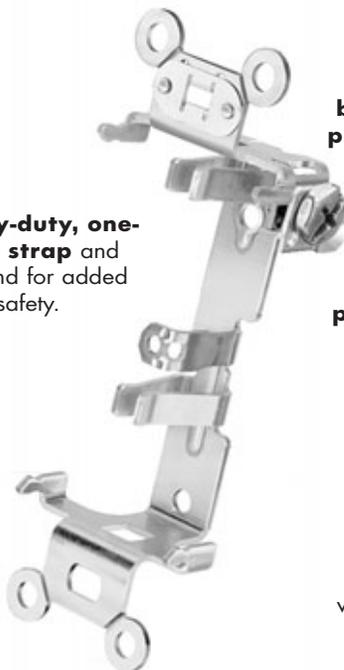

5362-AI

Field Uses/Vertical Markets

- Industrial
- Health Care
- Education
- Institutional

Straight Blade Receptacles Extra Heavy-Duty 15 & 20A, 125 & 250V

Ordering Information

Catalog Number	Rating		Color	NEMA Config. No.
	A.	V.		
Duplex Receptacles Back & Side Wire				
5262-AI	15	125	Ivory	5-15R
5262-AW	15	125	White	5-15R
5262-A	15	125	Brown	5-15R
5262-AGRY	15	125	Gray	5-15R
5262-ABK	15	125	Black	5-15R
5262-ARED	15	125	Red	5-15R
5262-ALA	15	125	Light Almond	5-15R
*CR6200	15	125	Yellow	5-15R
5362-AI	20	125	Ivory	5-20R
5362-AW	20	125	White	5-20R
5362-A	20	125	Brown	5-20R
5362-AGRY	20	125	Gray	5-20R
5362-ABK	20	125	Black	5-20R
5362-ARED	20	125	Red	5-20R
5362-ALA	20	125	Light Almond	5-20R
*CR6300	20	125	Yellow	5-20R
5662-AI	15	250	Ivory	6-15R
5662-AW	15	250	White	6-15R
5662-A	15	250	Brown	6-15R
5662-AGRY	15	250	Gray	6-15R
5662-ABK	15	250	Black	6-15R
5662-ARED	15	250	Red	6-15R
5862-AI	20	250	Ivory	6-20R
5862-AW	20	250	White	6-20R
5862-A	20	250	Brown	6-20R
5862-AGRY	20	250	Gray	6-20R
5862-ABK	20	250	Black	6-20R
5862-ARED	20	250	Red	6-20R
5862-ALA	20	250	Light Almond	6-20R

*Corrosion-Resistant.



NEMA
5-15R



NEMA
5-20R



NEMA
6-15R



NEMA
6-20R

For more information on these and other P&S products refer to our Product Guide or visit our web site.

Straight Blade Receptacles Extra Heavy-Duty 15 & 20A, 125 & 250V




Pass & Seymour

Technical Specifications

3rd Party Compliance	
UL Listed, File Number E140596, Standard UL498.	
Federal Specification WC596.	
CSA Certified, File Number LR16063, Standard CSA-C22.2 No. 42.	

Performance	
Electrical	
Dielectric Voltage	Withstands 2000V minimum
Maximum Working Voltage	250V
Current Interrupting	Certified for current interrupting at full-rated current
Temperature Rise	Maximum 30°C temperature rise at full-rated current after 50 cycles of overload at 150% of rated current with direct current
Mechanical	
Terminal Identification	Terminal Identification in accordance with UL498 (Brass, White, Green)
Terminal Accommodation	#14 AWG – #10 AWG copper conductor only
Product Identification	Ratings are a permanent part of the device
Environmental	
Flammability	UL94 V2
Operating Temperature	Maximum continuous +60°C, minimum -40°C without impact

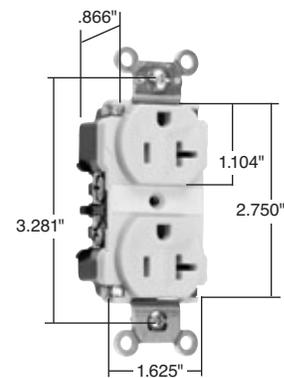

Dimensions for
15 & 20 Amp


Materials			
Face	Nylon	Terminal Screws	#10 Tri-Drive Brass
Back Body	Nylon		(Neutral = Nickel-Plated Steel)
Line Contacts	*.036 688 Brass	Ground Screw	#10 Hex Tri-Drive Brass
Mounting Strap	*.050 688 Brass	Assembly Drive Screw	Zinc-Plated Steel
Ground Contacts	*Strap with Integral Ground	Auto-Ground Clip	*Brass
Pressure Plate	*.031 260 Brass	Mounting Screws	*Tri-Drive Steel

*CR6200 and CR6300 are Nickel-Plated Steel.

Warranty


1 Year

Complimentary Devices & Accessories

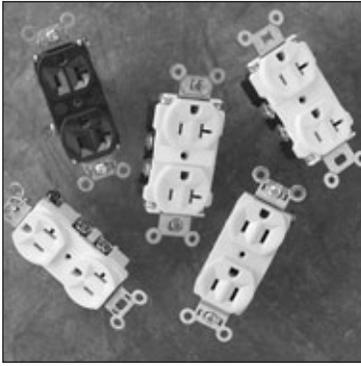

STRAIGHT BLADE RECEPTACLES

- Heavy-Duty
- Construction Grade
- Commercial Grade

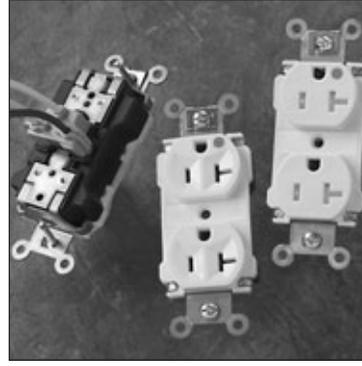


PLUGTAIL™ DEVICES

- Extra Heavy-Duty Hospital Grade Receptacles
- Heavy-Duty Hospital Grade Receptacles
- Extra Heavy-Duty Receptacles



DECORATOR DEVICES

- Construction Grade Switches
- Construction Grade Illuminated & Pilot Lighted Switches
- Construction Grade Receptacles
- Commercial Grade Receptacles
- Construction Grade Hallway Lights

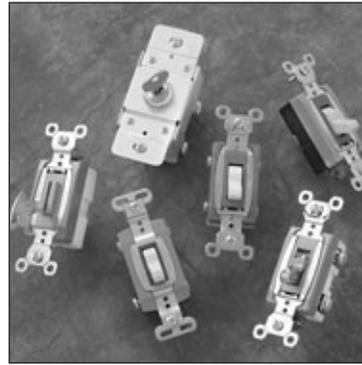

SWITCHES

- Heavy-Duty Toggle
- Heavy-Duty Lighted Toggle
- Heavy-Duty Security
- Heavy-Duty Locking
- Construction Grade Toggle
- Commercial Grade Toggle



GFCIs

- Construction Grade with Auto-Ground
- Construction Grade
- Construction Grade Dead Front



WALL PLATES

- TradeMaster® Thermoplastic Nylon
- Stainless Steel
- Brass
- Aluminum
- Dustproof Stainless Steel Covers

Also available...

- Light Almond Devices
- Hospital Grade Devices
- TVSS & Isolated Ground Devices
- Ground Continuity Monitoring (GCM)
- Straight Blade Plugs & Connectors
- Turnlok® Locking Devices
- Weatherproof Boxes & Covers
- IEC 309 Industrial Products
- Flexcor® Wire Mesh Grips
- Configurable Solutions



Legrand/Pass & Seymour
P.O. Box 4822
Syracuse, NY 13221-4822
800-223-4185

North America Headquarters
60 Woodlawn Street
West Hartford, CT 06110
Phone: 1.877.BY.LEGRAND (295.3472)
Fax: 1.860.232.2062
www.legrand.us

Legrand Canada
570 Applewood Crescent
Vaughan, ON, L4K 4B4
Phone: 905.738.9195
Fax: 905.738.9721
www.legrand.ca

SF301R1 — Updated January 2004 — For latest specs visit www.legrand.us/passandseymour