

Enduring solutions.


Incandescent lamps represent the original lighting technology, remaining virtually unchanged since their invention in the mid-19th century, and the lighting technology Satco was founded upon. This is the technology most everyone has become familiar with and the baseline comparison for all other lighting technologies. As the incandescent bulb becomes more and more regulated, Satco remains on the cutting edge of new lighting technologies. Still, we remain well-stocked with incandescent lamps in a multitude of wattages, base sizes, and shapes for every application.

Incandescent lamp features:

- High lumen output
- Up to 5,000 hour life
- Virtually every size and style imaginable
- Wattages from 3 to 500 Watts
- Durable vibration and rough service products
- Colored and special application types



Nuvo Lighting's Neval five light chandelier in Brushed Nickel with Satin White Glass. Nuvo item number 60-5485. See the www.nuvolighting.com website.

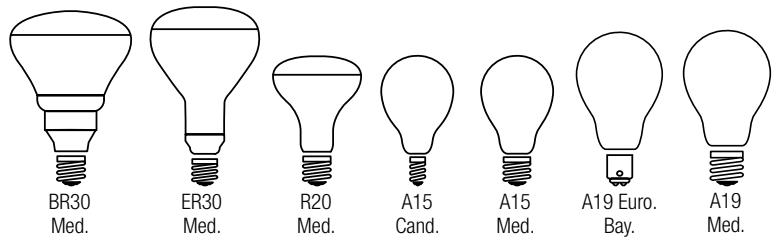

| Watts | Bulb Type | Base | Satco Prod. # | Lamp Code | Volts | Finish | M.O.L. Inches | Filament | Initial Lumens | Avg. Rated Hours | Pkg. Type | Master/Inner Carton | Notes |
|----------------------|-----------|-------|----------------|---------------|-------|--------|---------------|----------|----------------|------------------|-----------|---------------------|-------|
| 50 | BR30 | Med. | S3259 | 50BR30/FL | 120 | Frost | 5 3/8 | CC-9 | 360 | 2000 | Sleeve | 96/12 | |
| | ER30 | Med. | S4956 | 50ER30 | 130 | Frost | 6 1/8 | CC-6 | 310 | 2000 | Sleeve | 24 | |
| Shatter Proof | R20 | Med. | S4886 | 50R20/TF | 120 | Frost | 4 | CC-9 | 300 | 2000 | Sleeve | 96/12 | 4 |
| | | | S3203 | 50R20/A | 130 | Amber | 4 | CC-9 | — | 2000 | Sleeve | 96/12 | |
| | | | S3202 | 50R20/B | 130 | Blue | 4 | CC-9 | — | 2000 | Sleeve | 96/12 | |
| | | | S3201 | 50R20/G | 130 | Green | 4 | CC-9 | — | 2000 | Sleeve | 96/12 | |
| | | | S3212 | 50R20/PK | 130 | Pink | 4 | CC-9 | — | 2000 | Sleeve | 96/12 | |
| | | | S3200 | 50R20/R | 130 | Red | 4 | CC-9 | — | 2000 | Sleeve | 96/12 | |
| | | | S2850 | 50R20/GRO | 120 | Plant | 4 | C-9 | — | 2000 | Box | 96/12 | |
| | | | | | | | | | | | | | |
| 60 | A15 | Cand. | S4162 | 60A15/CL/E12 | 130 | Clear | 3 3/8 | C-9 | 700 | 1000 | Box | 500/25 | |
| | | | S2742 | 60A15/CL/E12S | 120 | Clear | 3 3/8 | C-9 | 700 | 1000 | CD/2 | 120/10 | |
| | | | S4163 | 60A15/F/E12 | 130 | Frost | 3 3/8 | C-9 | 700 | 1000 | Box | 500/25 | |
| | | | S2743 | 60A15/F/E12S | 120 | Frost | 3 3/8 | C-9 | 700 | 1000 | CD/2 | 120/10 | |
| | | Med. | S3870 † | 60A15/CL | 130 | Clear | 3 1/2 | C-9 | 580 | 2500 | Box | 500/25 | |
| | | | S3739 † | 60A15/CL | 130 | Clear | 3 1/2 | C-9 | 580 | 2500 | CD/1 | 240/20 | |
| | | | S3871 † | 60A15/F | 130 | Frost | 3 1/2 | C-9 | 570 | 2500 | Box | 500/25 | |
| | | | S3740 † | 60A15/F | 130 | Frost | 3 1/2 | C-9 | 570 | 2500 | CD/1 | 240/20 | |
| | | | S4882 | 60A15/TF | 130 | Frost | 3 1/2 | C-9 | 570 | 2500 | Box | 500/25 | 4 |
| | | | S4077 | 60A19/W/230V | 230 | White | 4 1/8 | C-9 | 570 | 1000 | Box | 120 | |
| | | | S3942 | 60A19/CL/VS | 130 | Clear | 4 1/8 | C-9 | 580 | 2500 | 2pk | 120 | |

NOTE: When using a 130 Volt lamp on a 120 Volt line, life is extended approximately 2.5 times and lumens are reduced approximately 20%.