


## In-Sure® Push-In Wire Connectors

### Strip. Push. Connect.

- No-twist, push-in design reduces repetitive motion fatigue
- Low insertion force for fast and easy connections
- Compact size makes installation easy
- Clear shell gives visual verification of connection
- Tough, UL 94V-2 flame-retardant shell rated at 105°C (221°F)
- Models 32, 33, 34 and 39 Listed for UL 467
- Models 32, 33, 34 are CE listed
- Models 87, 88, 90 are CE Listed

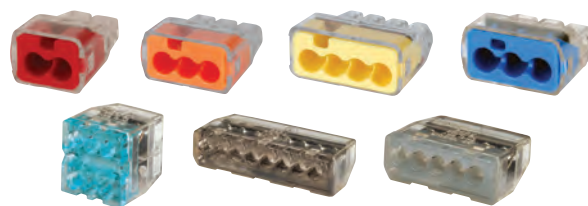

| Model | Color  | Ports     | Amp Rating | Wire Range                                                                                                                   |                                                       | Quantity        | Part No. |
|-------|--------|-----------|------------|------------------------------------------------------------------------------------------------------------------------------|-------------------------------------------------------|-----------------|----------|
| 32    | Red    | 2         | 20 Amp     | Solid: 20 – 12 AWG<br>Stranded: 16 – 12 AWG (≤19 str.)<br>18 AWG (7 Strand)<br>Stranded (Tin Bonded): 18 – 14 AWG (≤19 str.) | Box of 100                                            | 30-1032         |          |
|       |        |           |            |                                                                                                                              | Jar of 300                                            | 30-1032J        |          |
|       |        |           |            |                                                                                                                              | Box of 5,000                                          | 30-1632         |          |
| 33    | Orange | 3         | 20 Amp     |                                                                                                                              | Box of 100                                            | 30-1033         |          |
|       |        |           |            |                                                                                                                              | Jar of 250                                            | 30-1033J        |          |
|       |        |           |            |                                                                                                                              | Box of 5,000                                          | 30-1633         |          |
| 34    | Yellow | 4         | 20 Amp     |                                                                                                                              | Box of 100                                            | 30-1034         |          |
|       |        |           |            |                                                                                                                              | Jar of 200                                            | 30-1034J        |          |
|       |        |           |            |                                                                                                                              | Box of 5,000                                          | 30-1634         |          |
| 87    | Gray   | 5         | 20 Amp     |                                                                                                                              | Jar of 150                                            | 30-087J         |          |
|       |        |           |            |                                                                                                                              | Carton of 1,000                                       | 30-187          |          |
|       |        |           |            |                                                                                                                              | Box of 3,000                                          | 30-687          |          |
| 88    | Blue   | 6 Stacked | 20 Amp     |                                                                                                                              | Solid: 20 – 12 AWG                                    | Jar of 100      | 30-088J  |
|       |        |           |            |                                                                                                                              | Stranded: 16 – 14 AWG (≤19 str.)<br>18 AWG (7 Strand) | Carton of 1,000 | 30-188   |
|       |        |           |            |                                                                                                                              | Stranded (Tin Bonded): 18 – 14 AWG (≤19 str.)         | Box of 2,500    | 30-688   |
| 90    | Black  | 8         | 20 Amp     |                                                                                                                              | Jar of 100                                            | 30-090J         |          |
|       |        |           |            |                                                                                                                              | Carton of 1,000                                       | 30-190          |          |
|       |        |           |            |                                                                                                                              | Box of 2,000                                          | 30-690          |          |
| 39    | Blue   | 3         | 30 Amp     | Solid: 14 – 10 AWG                                                                                                           | Box of 50                                             | 30-1039         |          |
|       |        |           |            | Stranded: 12 – 10 AWG (≤19 str.)<br>Stranded (Tin Bonded): 14 – 10 AWG (≤19 str.)                                            | Jar of 150                                            | 30-1039J        |          |

COPPER TO COPPER ONLY. Do not use on aluminum. Temperature rating: 105°C (221°F) maximum. 600V maximum building wire, 1000V maximum signs or lighting fixtures.

## SpliceLine® In-Line Wire Connectors

- Faster alternative to traditional butt splices
- Crimp-free, solderless push-in butt splice
- Slim design fits through 1/2 in. knockout
- Perfect for lengthening wire
- Transparent polycarbonate housing for visual inspection of connection
- Listed for UL 467



**SpliceLine®**



| Model | Color  | Rating            | Wire Range                                                                                      | Quantity     | Part No.        |
|-------|--------|-------------------|-------------------------------------------------------------------------------------------------|--------------|-----------------|
| 42    | Orange | 600V/20A<br>105°C | Solid: 20-12 AWG<br>Stranded: 16-12 AWG (≤19 str.)<br>Stranded Tin-Bonded: 18-14 AWG (≤19 str.) | Bag of 10    | <b>30-1342S</b> |
|       |        |                   |                                                                                                 | Box of 100   | <b>30-1042</b>  |
|       |        |                   |                                                                                                 | Jar of 300   | <b>30-1042J</b> |
|       |        |                   |                                                                                                 | Box of 2,500 | <b>30-1642</b>  |