


Infloor System Activations



Source I® Series Flush Activations offer a wide variety of single service power and communication activations for infloor distribution systems. Source I fittings are available in brass or in black or brown polycarbonate finishes. They are ideal for new construction and retrofit projects and can be used as presets or aftersets with Walkerdut® and Walkercell® systems.

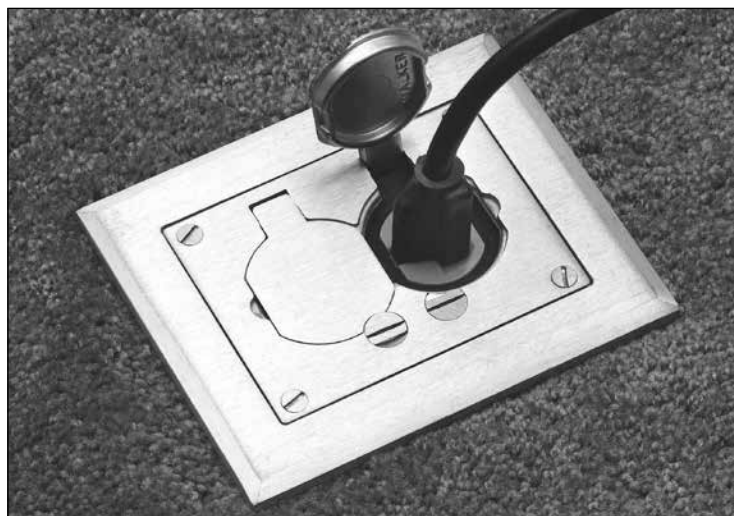

Source I Single-Gang Flush Service Fittings in brass.

FEATURES & BENEFITS

- **Preset or afterset capability offers flexibility.** Source I Activations can be installed as preset or afterset activations providing future flexibility.
- **Unique lock feature on duplex plates.** Duplex device plate has lid covers that can be locked when receptacle is not in use. Protects receptacle from damage.
- **“Plug-thru” membrane receptacle cover.** Receptacles are protected by a dust blocking “plug-thru” membrane that protects receptacle from damage.
- **Attractive low profile fittings.** Flush feature compliments office interior while providing functional services.
- **Configure service fittings as needed.** Flanges and faceplates are ordered separately to create the desired activation unit that can be modified as future power and communication requirements change.
- **Datacom connectivity options.** Accepts industry standard and proprietary devices from a wide range of manufacturers to provide a seamless and aesthetically pleasing interface for voice, data, audio, and video applications at the point-of-use.
- **cULus Listed.** All Source 1 Series Flush Activations are UL Listed to U.S. and Canadian safety standards.



Source I Series Nonmetallic Single-Gang Flush Service Fitting.


Source I Series Flush Activations Ordering Information (continued)

Catalog No./Item	Description/Specifications	Catalog No./Item	Description/Specifications
829CK-1 	Cover Plate – Flush brass communication cover plate (2 5/8" and 1" diameter trade size screw plugs) with four mounting screws.	439 	Attaching Ring – For polycarbonate afterset use only. No adjusting ring required. 4" [102mm] O.D. Four #6-32 hold-down screws provided.
828SPTC 	Cover Plate – Flush brass communication cover plate. 1 1/2" diameter trade size screw plugs.	897AR 	Adjusting Ring – Adjusting ring (with three adjusting screws) for use with 437 Attaching Rings – power for brass fitting only. 3 25/32" [96mm] O.D.
437 	Attaching Ring – Attaching Rings for Source I (Preset or Afterset) zinc die-cast. 4" [102mm] O.D. Add suffix to Cat. No. to indicate ring depth: 7/8", 1 1/8", 1 1/2", 2", 2 3/8", or 3 1/8".	898AR 	Adjusting Ring – Adjusting ring (with three adjusting screws) for use with 437 Attaching Rings – communication only (brass and polycarbonate fittings) and power for polycarbonate fitting only. 3 25/32" [96mm] O.D.
S1MC 	Mudcap – For Source I 437 Attaching Ring. 4" [102mm] O.D.	S1ER 	Attaching Ring Extension – Extension ring – mounts on top of 437 Attaching Ring. Includes extension ring and three mounting screws. 4" [102mm] O.D. Add suffix to indicate ring height: 7/8", 1 1/8", 1 1/2", 2", 2 3/8", 3 1/8". We recommend using a shallow Attaching Ring and deep extension ring whenever possible.
S1MC-MS 	Mudcap – For Source I Attaching Ring with marker screw. 4" [102mm] O.D. Use with 437 Attaching Rings only.		

437 Preset Insert Installation Guidelines

Drill 2 1/2" [64mm] hole in duct where activation is desired. Install attaching ring in hole in raceway before concrete is poured. Attaching ring is secured by tightening locking tabs. Be sure the locking tabs are oriented lengthwise with the raceway. The mudcap should be securely in place before the concrete pour. After the pour, chip away concrete and remove mudcap. Attach 437 Ring, 897/898AR Ring and Service Fitting (not shown).

NOTE: 437 Attaching ring can be used as a preset or afterset.

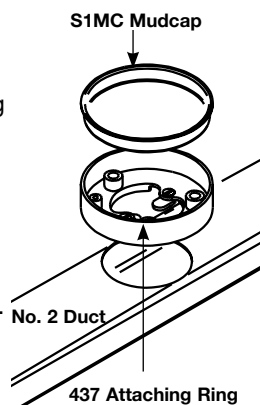

439 Afterset Insert & Polycarbonate Source I Fitting

