



## TYPE NBCE

### Features

- Manufactured from high strength copper
- Electro-tin plated
- Assemblies available with 8-123 circuits
- UL Recognized for grounding and power, and CSA Certified


### Benefits

- Provides maximum conductivity
- Low contact resistance
- Application versatility
- Ensures reliability

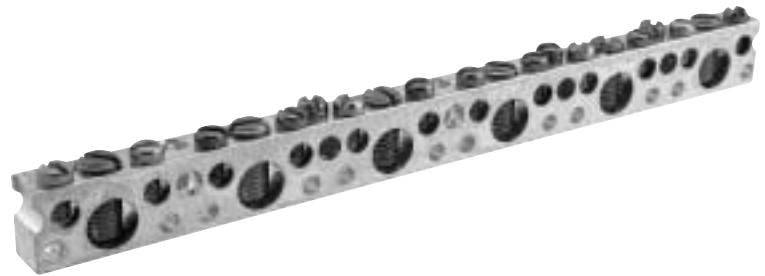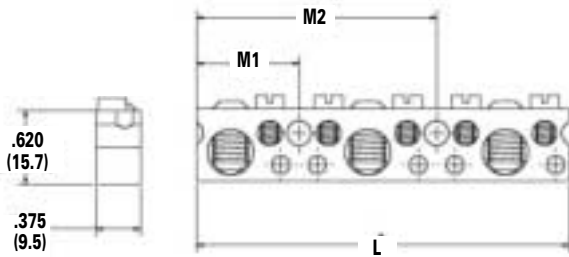

C

Catalog Number	Number of Large Circuits <sup>1</sup>	Number of Small Circuits <sup>2</sup>	Mounting Hole Locations <sup>3</sup> in. (mm)				Dimensions in. (mm)	
			M1		M2		L	
NBCE-0305-2	3	5	1.133	(28.8)	2.305	(58.5)	3.176	(80.7)
NBCE-0615-2	6	15	3.477	(88.3)	5.821	(147.9)	6.954	(176.6)
NBCE-1336-2	13	36	5.821	(147.9)	8.165	(207.4)	15.158	(385.0)
NBCE-3192-0	31	92	-	-	-	-	36.250	(920.8)



<sup>1</sup> Large Circuits have a conductor range of 1/0-14AWG

<sup>2</sup> Small Circuits have a conductor range of 6-14AWG

<sup>3</sup> Mounting holes have a diameter of 0.203 in. (5.2mm)

Catalog Number	Configuration
NBCE-0305-2	★●★○★●★●
NBCE-0615-2	★●★★★●★★★●★○★●★★★●★○★●★
NBCE-1336-2	★●★★★●★★★●★★★●★★★●★○★●★★★●★○★●★★★●★★★●★★★●★★★●★★★●★★★●
NBCE-3192-0	★●★★★● ..... ★★● x 28 ..... ★★●★

All wire sizes, unless noted otherwise, are American Wire Gauge (AWG)  
 Tested to UL 486A/B, UL File E6207 and CSA C22.2 No. 65-03  
 Tested to UL 467, UL File E6207

★	Hole for small circuit
●	Hole for large circuit
○	Hole for mounting screw

