

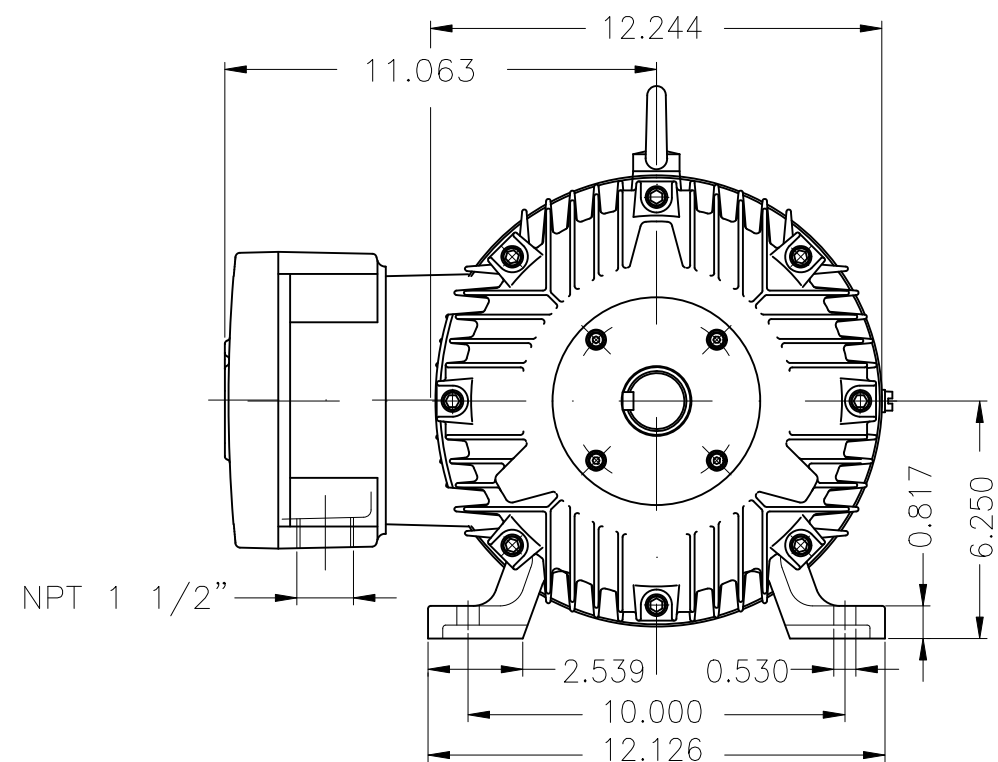




Grounding for leads 5.2–25 mm² / 10–4 AWG.

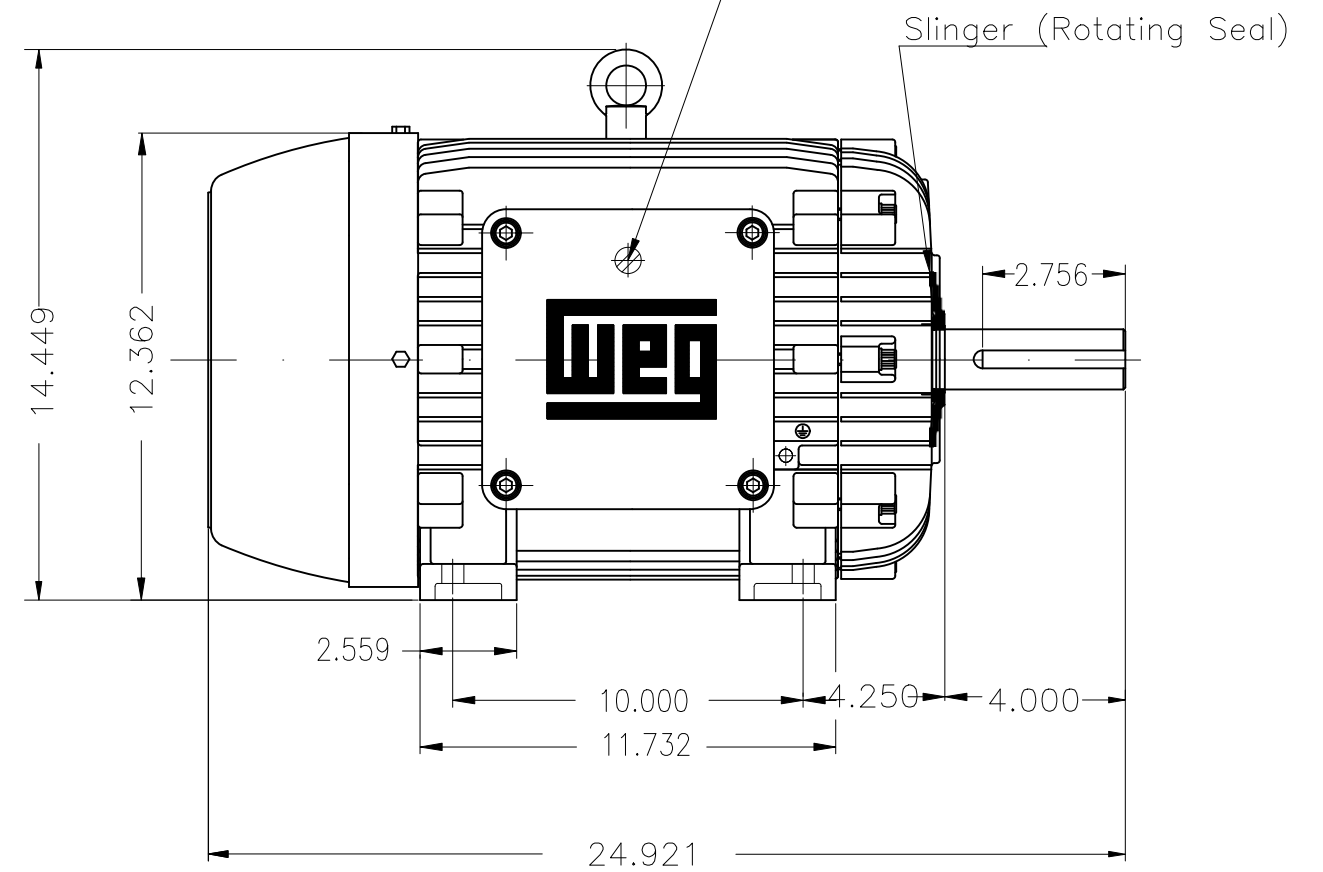

20 HP 04 Poles 60 Hz										A	
							HYBRISUSER			00	
ECM	LOC	SUMMARY OF MODIFICATIONS					EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	HYBRISUSER		THREE PH. MOTOR EXPLOSION PROOF NEMA PREM. EFF. FRAME 256T IP55 TEFC				PREVIEW WDD 00				
CHECKED											
RELEASED											
REL. DATE		WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1					

WEG's property. Forbidden reproduction without previous authorization.