

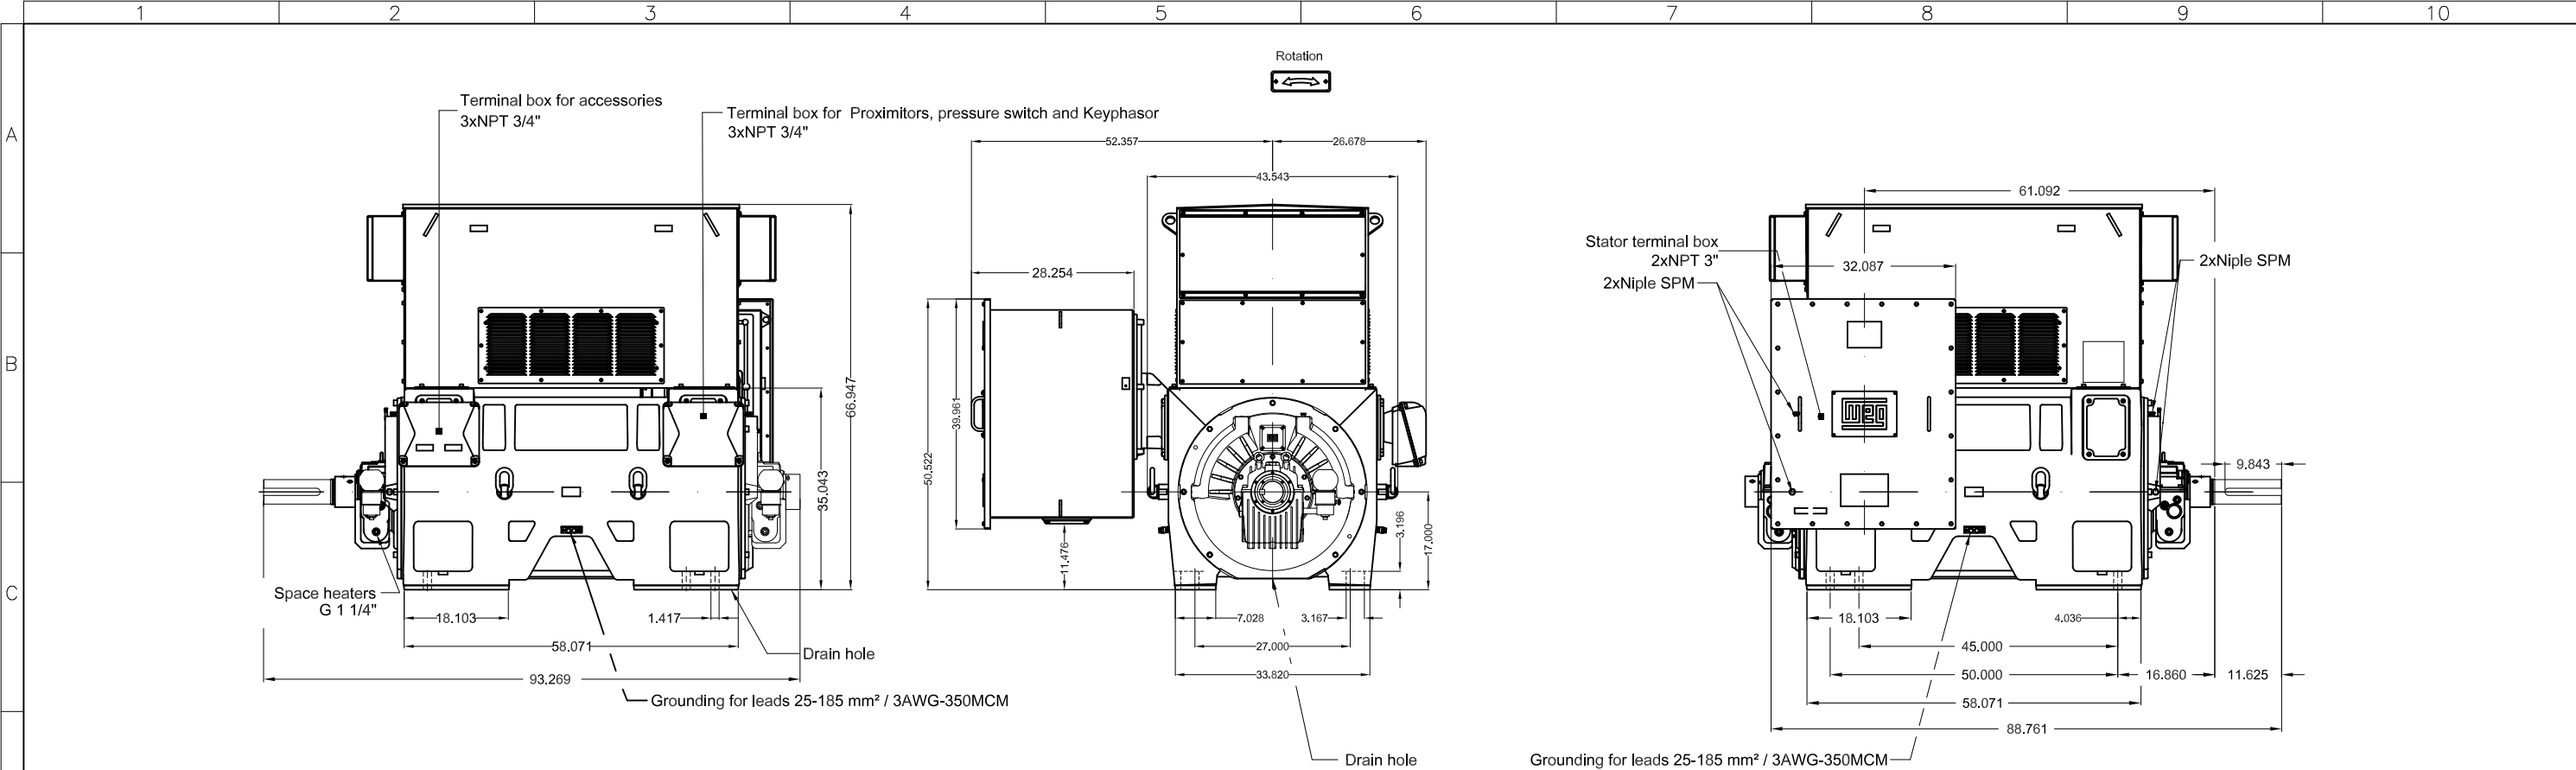





- Main terminal box can be rotated in 90° steps
- Connection cables 2000+100mm length from terminal box
- With jacking screws
- Connection cables coiled inside the main terminal box
- DE and NDE sleeve bearings electrically insulated
- Nameplate of the accessory terminal box
- Space heaters 110 to 127 V
- Terminal with 13 mm diameter hole for connection bolt
- Vibration grade according to API 541/547
- Stainless steel screws - AISI 316
- Provision for pressure switch sensor
- 304 stainless steel filter on air inlet
- Designed for 2 Bently Nevada proximitors sensors per bearing and 1 Keyphasor on DE bearing
- Bearings with glass Trico Oilers
- Frame designed for dowel pins
- SPM studs
- Main terminal box with space heaters
- DE and NDE sleeve bearings designed for space heaters
- Color RAL 5009
- Painting plan 212P
- Mounting NEMA F-1
- Position of the stator terminal box can be changed (right / left)
- Mounting B3R(D)



		Bearing		Lubricant		
		DE	FNLB 9-100	ISO VG46		
		NDE	FNLB 9-100	ISO VG46		
1500 HP 04 Poles 60 Hz 2300/4000 V						A
WEC HOUSE ACCOUNT ENERGY						
					1:25	
		ALTERADO CONFORME PCR - 100000188901		GABRIELID	SANDRESSA	SANDRESSA
		ALTERADO CONFORME PCR - 100000183125		JOHNLENNONN	PAOLLA	PAOLLA
ECM	LOC	SUMMARY OF MODIFICATIONS		EXECUTED	CHECKED	RELEASED
EXECUTED	LUCASH		THREE PH. MOTOR W60 HAZARDOUS AREA	1281918582		
CHECKED	JALINE		FRAME 6810/11 IP24 ODP WPII			
RELEASED	JALINE					
REL. DATE	07.06.2022	WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1