

12345678910

A

B

C



D

E

F

G



H

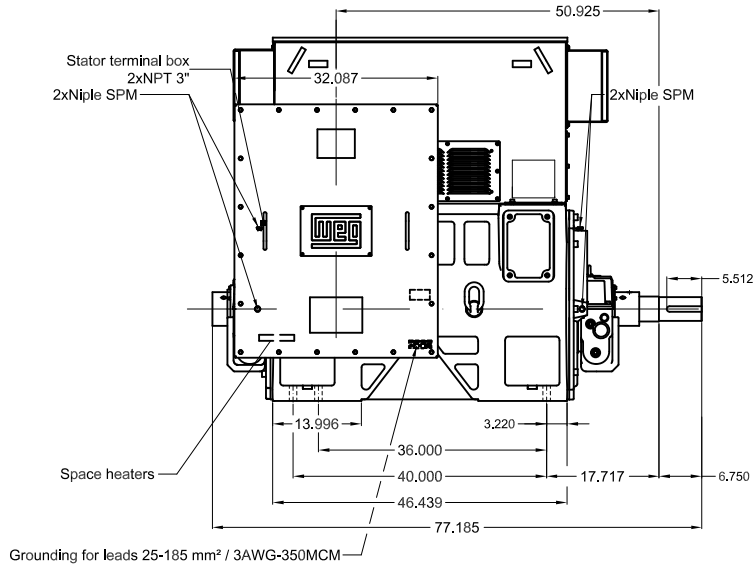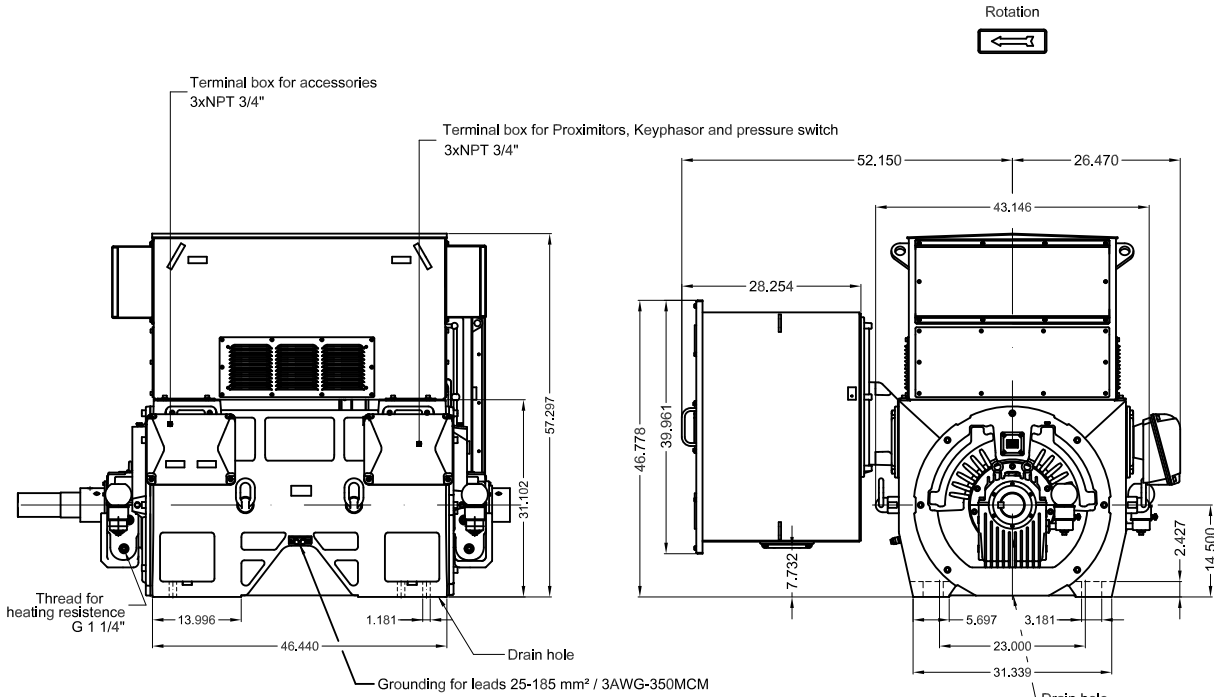

Additional plate (engine information 01) supplied in single
Main terminal box can be rotated in 90° steps
Connection cables 2000+100mm length from terminal box
NDE balancing disc
Connection cables coiled inside the main terminal box
Nameplate of the accessory terminal box
With two nameplates supplied loose, one according to auxiliary FD data

Terminal with 13 mm diameter hole for connection bolt
Designed for keyphasor on DE bearing
DE and NDE sleeve bearings designed for space heaters
Axial clearance ± 3 mm
Tightening torque of cover screws and bearings = 69Nm
Designed for Proximitor sensor on bearings (2 per bearing)
Finish color Munsell 2.5 YR 6/14 inside of terminal box
Double vacuum impregnation
Stainless steel screws - AISI 316
Provision for pressure switch sensor
304 stainless steel filter on air inlet
Bearings with glass Trico Oilers
Frame designed for dowel pins
Nameplate of the space heater terminal box
Main terminal box with space heaters

Color RAL 5009
Painting plan 212P
Mounting NEMA F-1
Position of the stator terminal box can be changed (right / left)
Mounting B3R(D)



1500 HP 02 Poles 60 Hz 2300/4000 V							A
WEC HOUSE ACCOUNT ENERGY							
							1:21
PCR 100000193154			RBOECK	FRANCINES	FRANCINES	15.08.2023	08
PCR 100000193154			RBOECK	CLEBERP	CLEBERP	15.08.2023	07
ECM	LOC	SUMMARY OF MODIFICATIONS			EXECUTED	CHECKED	RELEASED
EXECUTED	LUCASH	THREE PH. MOTOR W60 HAZARDOUS AREA			1306128581		
CHECKED	TBAZZANELLA	FRAME L5810/11 IP24 ODP WPII			WDD 08		
RELEASED	TBAZZANELLA						
REL. DATE	12.09.2022	WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1	