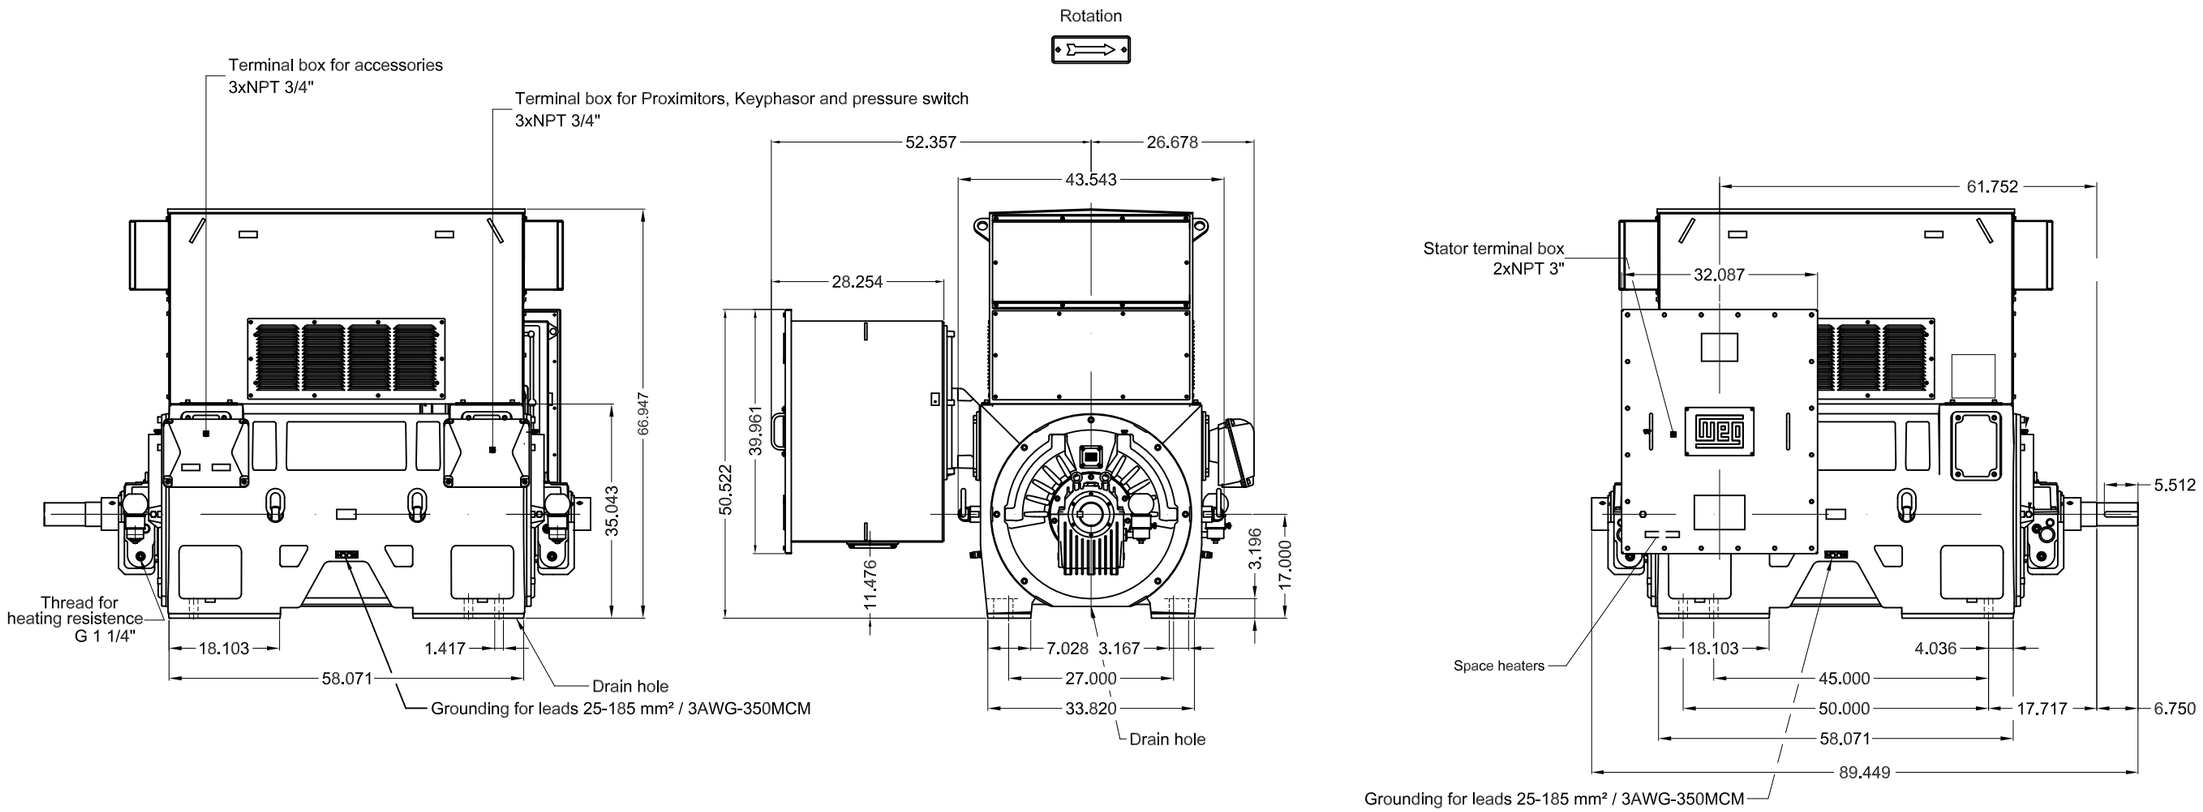

- NDE balancing disc
- Connection cables coiled inside the main terminal box
- Nameplate of the accessory terminal box
- Terminal with 13 mm diameter hole for connection bolt
- Designed for keyphasor on DE bearing
- DE and NDE sleeve bearings designed for space heaters
- Axial clearance ± 3 mm
- Tightening torque of cover screws and bearings = 69Nm
- Designed for Proximitor sensor on bearings (2 per bearing)
- Special Drive-End internal air deflector
- NDE Sleeve Bearing - electrically insulated
- Finish color Munsell 2.5 YR 6/14 inside of terminal box
- Provision for pressure switch sensor
- 304 stainless steel filter on air inlet
- Bearings with glass Trico Oilers
- Frame designed for dowel pins
- Nameplate of the space heater terminal box
- SPM studs
- Main terminal box with space heaters
- Color RAL 5009
- Painting plan 212P
- Mounting NEMA F-1
- Position of the stator terminal box can be changed (right / left)
- Mounting B3R(D)

DE Shaft End



DUNC 7/8"-9 WEG WPR-7339

Vibration sensor studs detail



1750 HP 02 Poles 60 Hz 2300/4000 V | A

WEC HOUSE ACCOUNT ENERGY

1:25

ECM	LOC	SUMMARY OF MODIFICATIONS	EXECUTED	CHECKED	RELEASED	DATE	VER
		PCR 100000188894	RBOECK	CLEBERP	CLEBERP	20.07.2023	10
		PCR 100000183120	RBOECK	CLEBERP	CLEBERP	05.06.2023	09

EXECUTED	MAIKONP	THREE PH. MOTOR W60 HAZARDOUS AREA	1203214370
CHECKED	CLEITONGS	FRAME 6810/11 IP24 ODP WPII	WDD 10
RELEASED	GCASTRO		
REL. DATE	30.06.2021	WMO Jaragua do Sul Product Engineering	SHEET 1 / 1

Dimensions in inches

XME A3

CERTIFIED WEG MOTORES - Certified document. Not subject to changes.

WEG's property. Forbidden reproduction without previous authorization.