

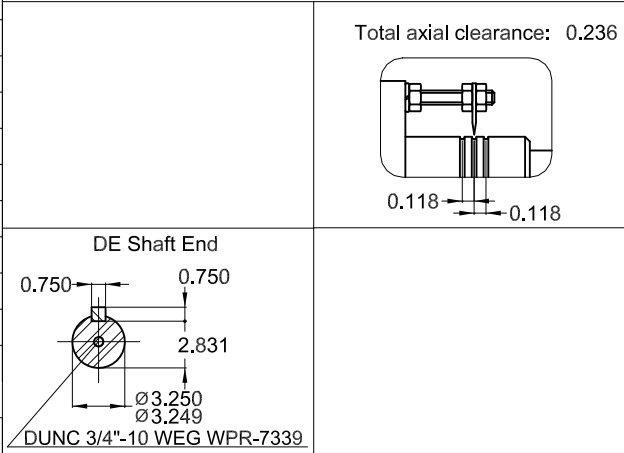



- Main terminal box can be rotated in 90° steps
- Connection cables 2000+100mm length from terminal box
- Designed for Bently Nevada proximitor sensors (2 per bearing) and 1 keyphasor
- With two sets of nameplates/label, one supplied loose
- Connection cables coiled inside the main terminal box
- With three nameplates supplied loose, two according to data from auxillary FDs
- Nameplate of the accessory terminal box
- Terminal with 13 mm diameter hole for connection bolt
- DE and NDE sleeve bearings designed for space heaters
- NDE Sleeve Bearing - electrically insulated
- Vibration grade according to API 541/547
- Stainless steel screws - AISI 316
- Provision for pressure switch sensor
- 304 stainless steel filter on air inlet
- Bearings with glass Trico Oilers
- Frame designed for dowel pins
- Main terminal box with space heaters
- Color RAL 5009
- Painting plan 212P
- Mounting NEMA F-1
- Position of the stator terminal box can be changed (right / left)
- Mounting B3R(D)



600 HP 02 Poles 60 Hz 2300/4000 V										A
WEC HOUSE ACCOUNT ENERGY										
							1:20			
		ALT. CONF. PCR 100000193138				GABRIELID	NARDELLI	NARDELLI	18.12.2023	09
		PCR 100000182827				RBOECK	CLEBERP	CLEBERP	01.06.2023	08
ECM	LOC	SUMMARY OF MODIFICATIONS				EXECUTED	CHECKED	RELEASED	DATE	VER
EXECUTED	DOGE		THREE PH. MOTOR W60 HAZARDOUS AREA FRAME 5010/11 IP24 ODP WP11				1196807490			
CHECKED	RPAULI						WDD   09			
RELEASED	GCASTRO									
REL. DATE	25.05.2021	WMO	Jaragua do Sul	Product Engineering	SHEET	1 / 1				