


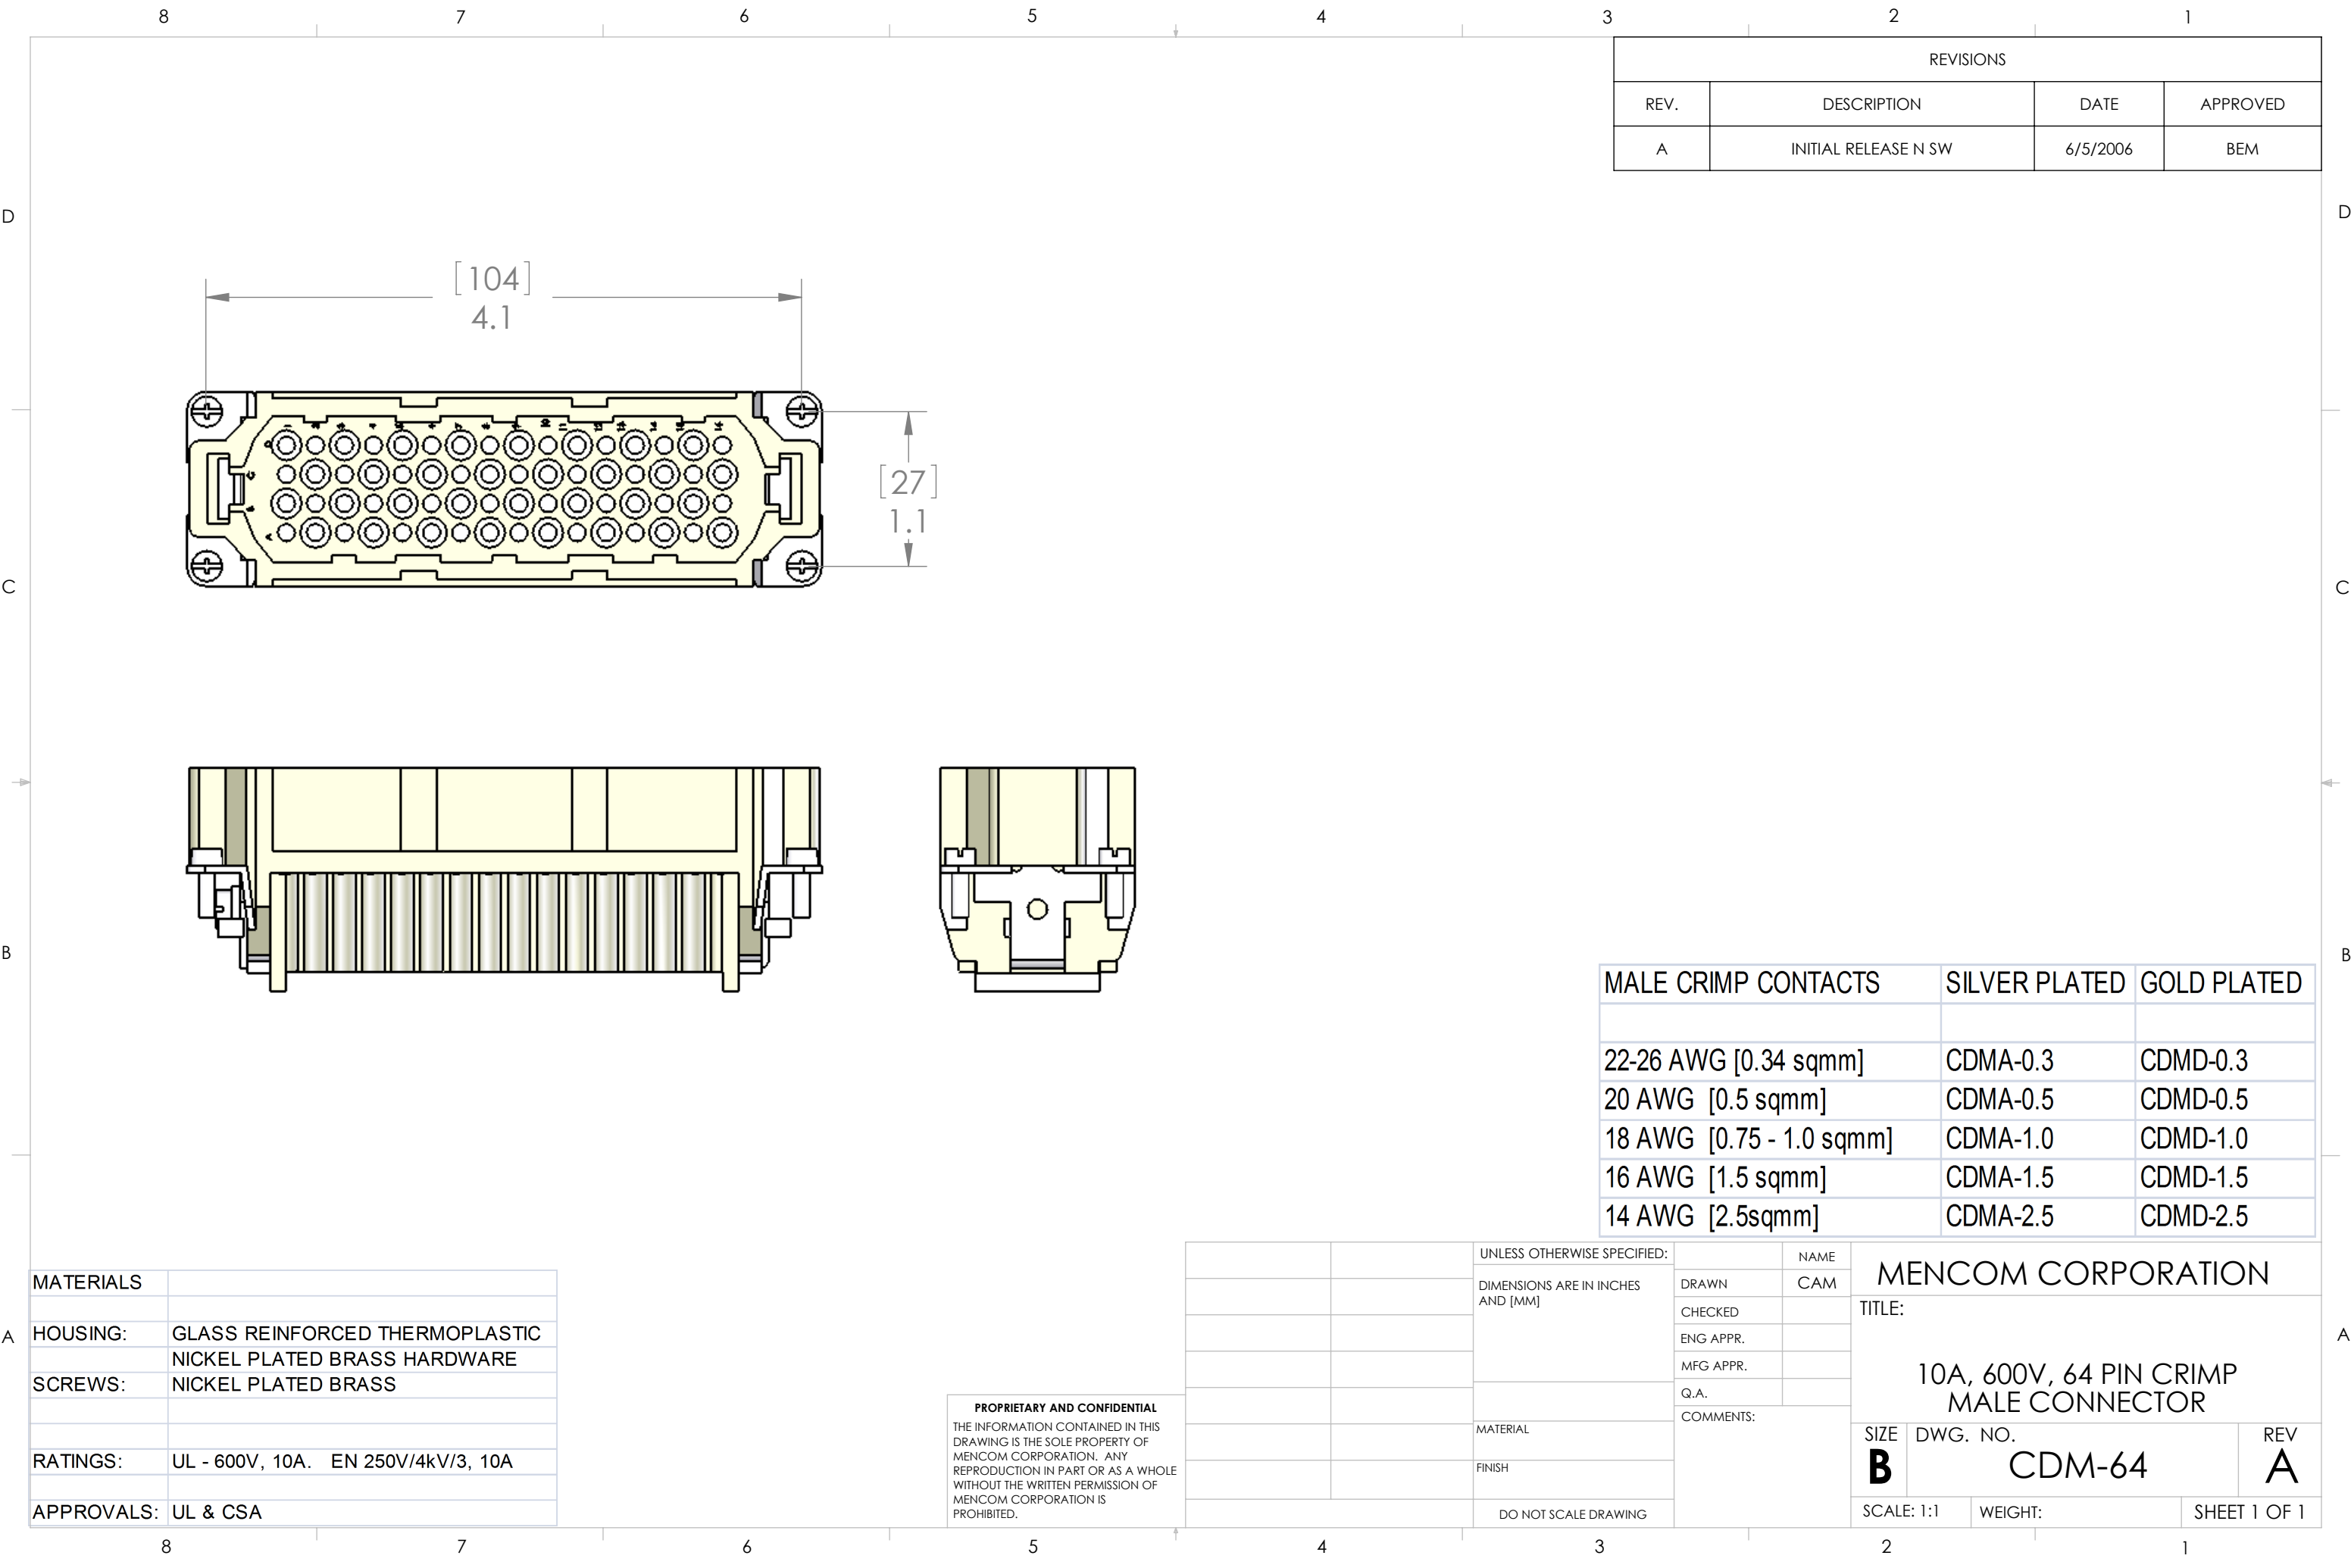

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE N SW	6/5/2006	BEM

MALE CRIMP CONTACTS	SILVER PLATED	GOLD PLATED
22-26 AWG [0.34 sqmm]	CDMA-0.3	CDMD-0.3
20 AWG [0.5 sqmm]	CDMA-0.5	CDMD-0.5
18 AWG [0.75 - 1.0 sqmm]	CDMA-1.0	CDMD-1.0
16 AWG [1.5 sqmm]	CDMA-1.5	CDMD-1.5
14 AWG [2.5sqmm]	CDMA-2.5	CDMD-2.5

MATERIALS	
HOUSING:	GLASS REINFORCED THERMOPLASTIC
SCREWS:	NICKEL PLATED BRASS HARDWARE
	NICKEL PLATED BRASS
RATINGS:	UL - 600V, 10A. EN 250V/4kV/3, 10A
APPROVALS:	UL & CSA

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

		UNLESS OTHERWISE SPECIFIED:		NAME
		DIMENSIONS ARE IN INCHES AND [MM]	DRAWN	CAM
			CHECKED	
			ENG APPR.	
			MFG APPR.	
			Q.A.	
			COMMENTS:	
		MATERIAL		
		FINISH		
		DO NOT SCALE DRAWING		

MENCOM CORPORATION

TITLE:

10A, 600V, 64 PIN CRIMP
MALE CONNECTOR

SIZE	DWG. NO.	REV
B	CDM-64	A

SCALE: 1:1	WEIGHT:	SHEET 1 OF 1
------------	---------	--------------