


8 7 6 5 4 3 2 1

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/27/2011	DCT

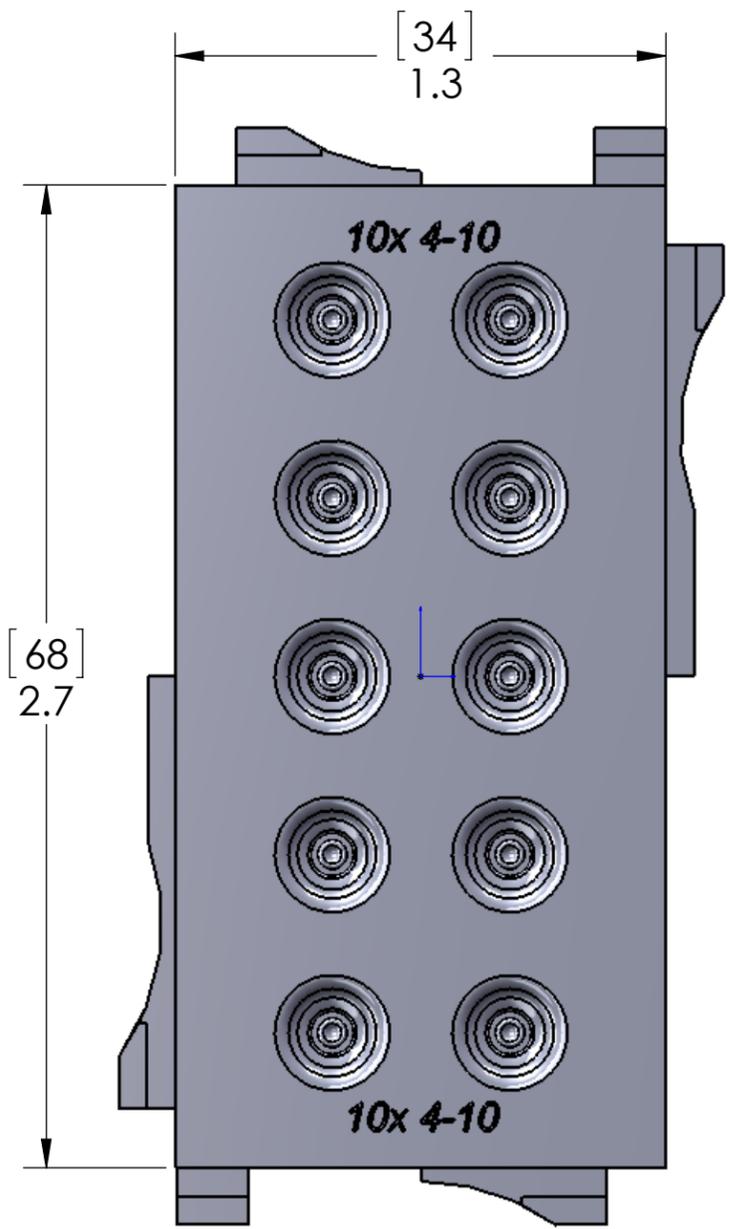

CABLE ENTRY RANGE: 4-10mm

MATERIALS:	
BODY:	FIBERGLASS REINFORCED POLYPROPYLENE
CABLE ENTRY:	SOFT TPE INSERT MEMBRANE
PROTECTION:	IP65
TEMP:	-20°C...+125°C
UL APPROVED HALOGEN-FREE MATERIAL	

PROPRIETARY AND CONFIDENTIAL
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME
DIMENSIONS ARE IN INCHES AND [MM]		CAM
		DRAWN
		CHECKED
		ENG APPR.
		MFG APPR.
		Q.A.
		COMMENTS:
MATERIAL		
FINISH		
DO NOT SCALE DRAWING		

MENCOM CORPORATION

TITLE:
CABLE ENTRY SYSTEM
 10x4 mm, 68 mm, 34 mm

SIZE	DWG. NO.	REV
B	FLI-42-003	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1

8 7 6 5 4 3 2 1