REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	INITIAL RELEASE	10/27/2011	DCT

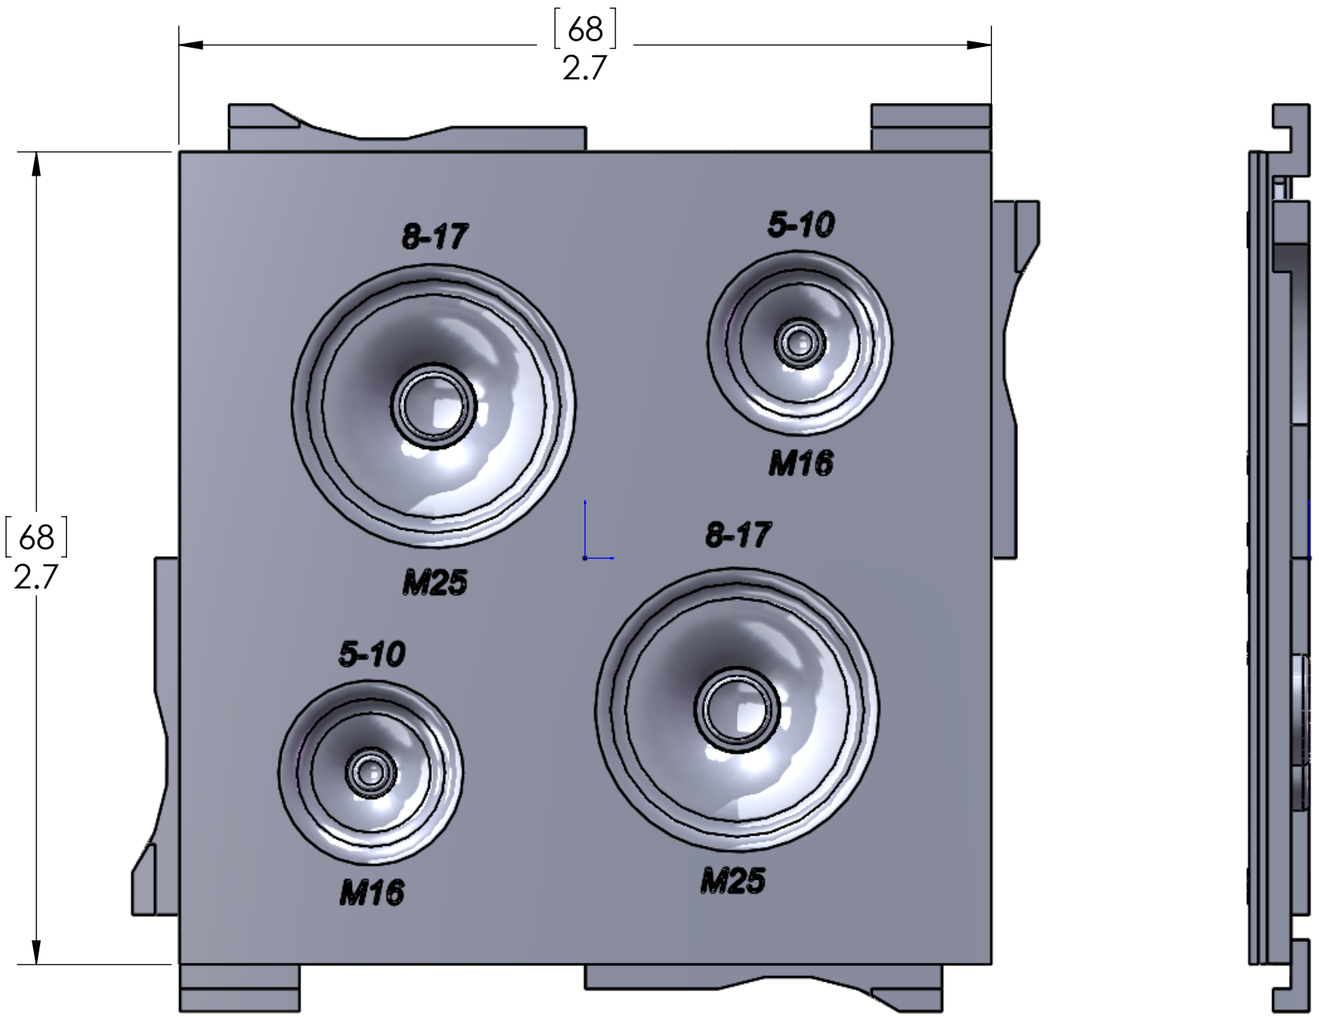

CABLE ENTRY RANGE:
M16: 5-10 mm
M25: 8-17 mm

MATERIALS:	
BODY:	FIBERGLASS REINFORCED POLYPROPYLENE
CABLE ENTRY:	SOFT TPE INSERT MEMBRANE
PROTECTION:	IP65
TEMP:	-20°C...+125°C
	UL APPROVED HALOGEN-FREE MATERIAL

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCOM CORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCOM CORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED:
DIMENSIONS ARE IN INCHES AND [MM]
MATERIAL
FINISH
DO NOT SCALE DRAWING

	NAME
DRAWN	CAM
CHECKED	
ENG APPR.	
MFG APPR.	
Q.A.	
COMMENTS:	

MENCOM CORPORATION

TITLE:
CABLE ENTRY SYSTEM
2xM16 and 2xM25,
68 mm x 68 mm

SIZE	DWG. NO.	REV
B	FLI-44-001	A
SCALE: 2:1	WEIGHT:	SHEET 1 OF 1