


WIRING		
MCV-12 Pin #	PORT / PIN	FUNCTION
5	All Ports / Pin 3	Common
7	All Ports / Pin 1	Ground
6	Port 1 / Pin 2	I/O
1	Port 2 / Pin 2	I/O
4	Port 3 / Pin 2	I/O
2	Port 4 / Pin 2	I/O
3	Port 5 / Pin 2	I/O
8	Port 6 / Pin 2	I/O

REVISIONS			
REV.	DESCRIPTION	DATE	APPROVED
A	REDRAWN IN SW	6/30/2009	

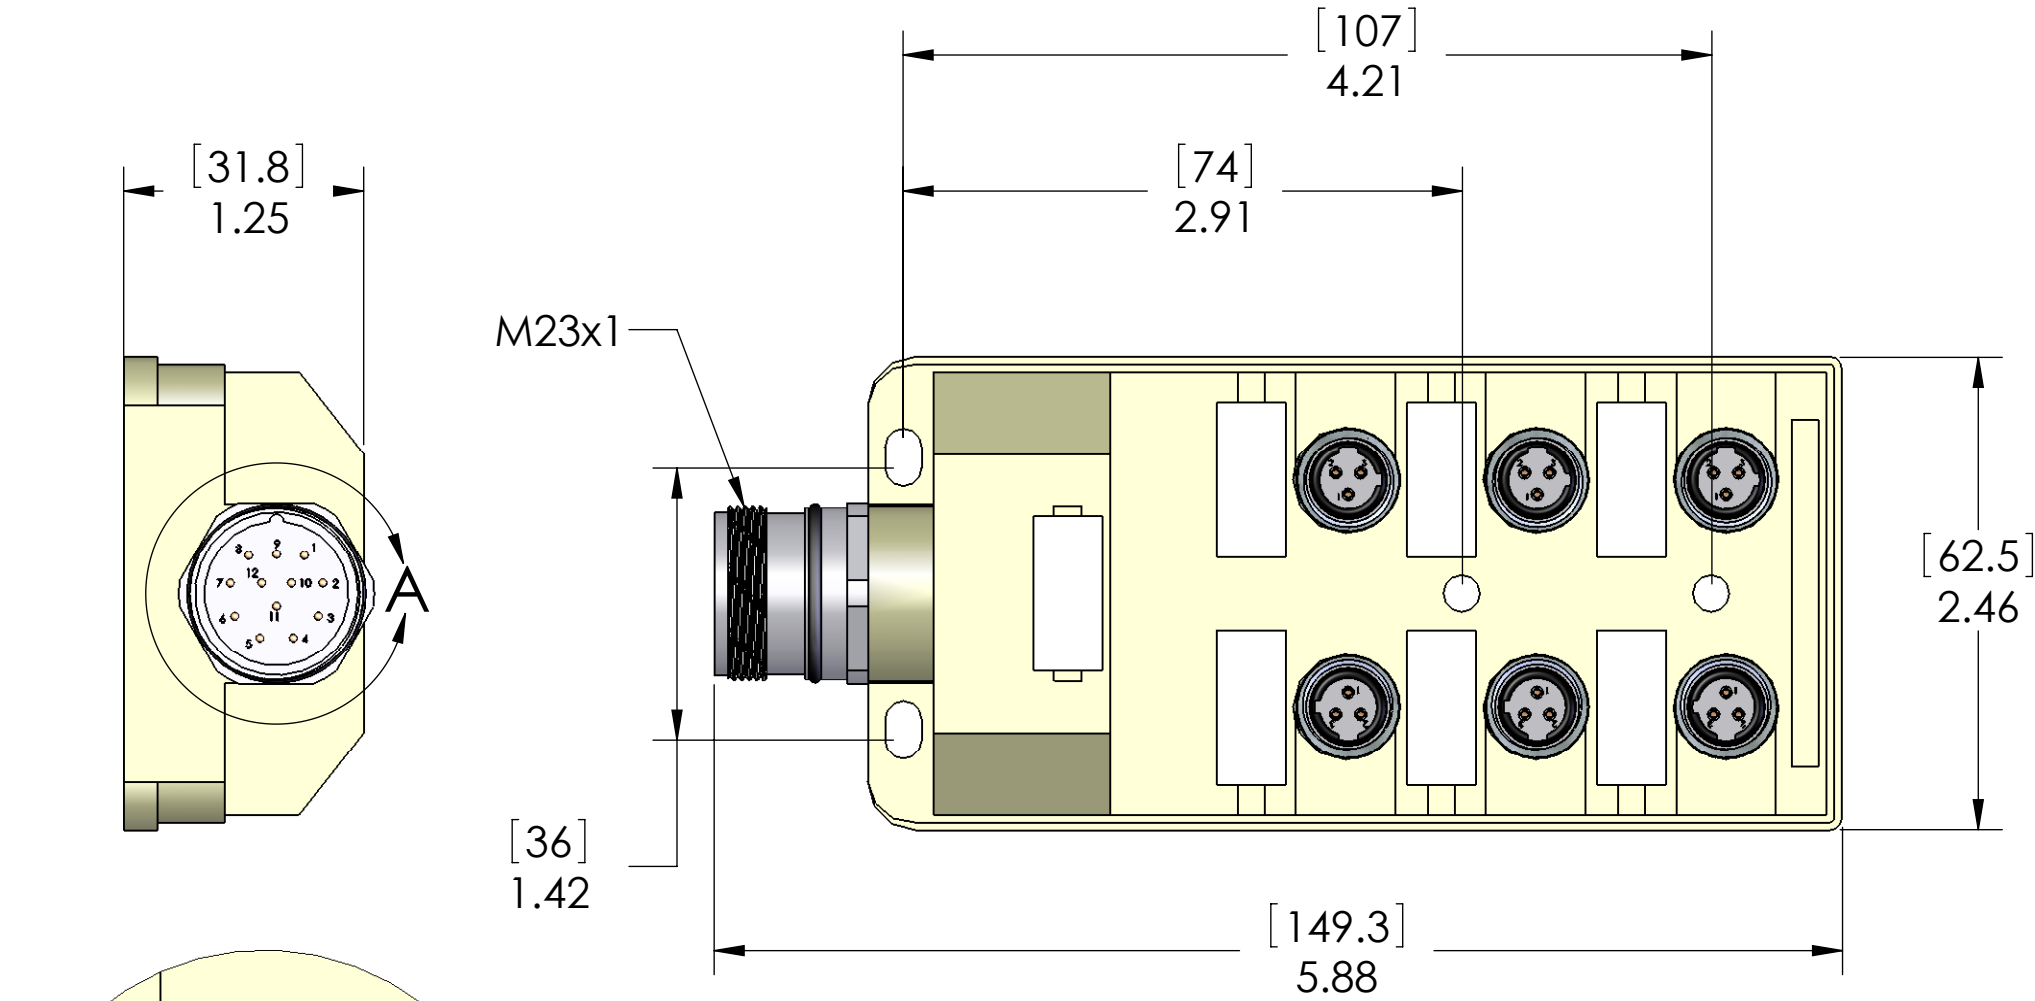

150V MAX
8A MAX PER BLOCK
3A MAX PER PORT

MATERIALS:	
BODY:	POLYPROPYLENE
INSERTS:	POLYAMIDE
COUPLINGS:	NICKEL PLATED BRASS
O-RINGS:	NBR
GLAND:	POLYAMIDE
CONN HSG:	NICKEL PLATED BRASS
CONN INS.:	PBT
CONTACTS:	GOLD PLATED COPPER ALLOY

PROPRIETARY AND CONFIDENTIAL
THE INFORMATION CONTAINED IN THIS
DRAWING IS THE SOLE PROPERTY OF
MENCOM CORPORATION. ANY
REPRODUCTION IN PART OR AS A WHOLE
WITHOUT THE WRITTEN PERMISSION OF
MENCOM CORPORATION IS
PROHIBITED.

UNLESS OTHERWISE SPECIFIED:		NAME	MENCOM CORPORATION	
DIMENSIONS ARE IN INCHES AND [MM]		DRAWN	BEM	TITLE:
		CHECKED		
		ENG APPR.		
		MFG APPR.		
MATERIAL		Q.A.		SIZE
		COMMENTS:		
FINISH				DWG. NO.
DO NOT SCALE DRAWING				JAC-630-012-V000
				REV
				A
		SCALE: 1:1	WEIGHT:	SHEET 1 OF 1