



JDC (M12) Junction Blocks

4 Port, 4 Pin JDC Junction blocks



MIN Receptacle | MIN Plug | M23 Receptacle | IP67 Protection Rating




Trunk Style	UL Rating	Trunk Connection	Part Number		
			No LED	PNP	NPN
	N/A	MIN Size II 7 Pole Male Receptacle	JDC-440-007-M000	JDC-44P-207-M000	JDC-44N-207-M000
	N/A	MIN Size III 12 Pole Male Receptacle	JDC-440-012-M000	JDC-44P-212-M000	JDC-44N-212-M000
	N/A	M23 12 Pole Male Receptacle	JDC-440-012-V000	JDC-44P-212-V000	JDC-44N-212-V000
	N/A	MIN Size II 7 Pole Male Plug with Male Thread	JDC-440-007-M003	JDC-44P-207-M003	JDC-44N-207-M003
	N/A	MIN Size III 12 Pole Male Plug with Male Thread	JDC-440-012-M003	JDC-44P-212-M003	JDC-44N-212-M003
	N/A	MIN Size III 7 Pole Male Plug	JDC-440-007-M**	JDC-44P-207-M**	JDC-44N-207-M**
	N/A	MIN Size III 12 Pole Male Plug	JDC-440-012-M**	JDC-44P-212-M**	JDC-44N-212-M**

** Lengths in meters. Standard Cable lengths are 2m, 5m and 10m. Consult factory for other lengths.

JDC Junction Blocks

Q

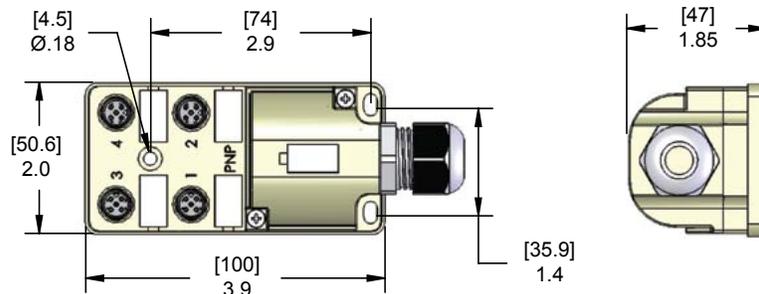

Specifications:

Ratings:	3 A per Connector 8 A per Block	Inserts:	Polyamide
Voltage:	Without LEDs: 0-150 Volt Max With LEDs: 48 VDC Max in accordance with LED Configuration	Port Coupling Nuts:	PBT
Body:	Polypropylene	O-Ring:	BUNA-N
		LED Lens:	Polycarbonate
		Contacts:	Copper Alloy with Gold Plating
		Marker Tags:	Polyamide (supplied on all units)