

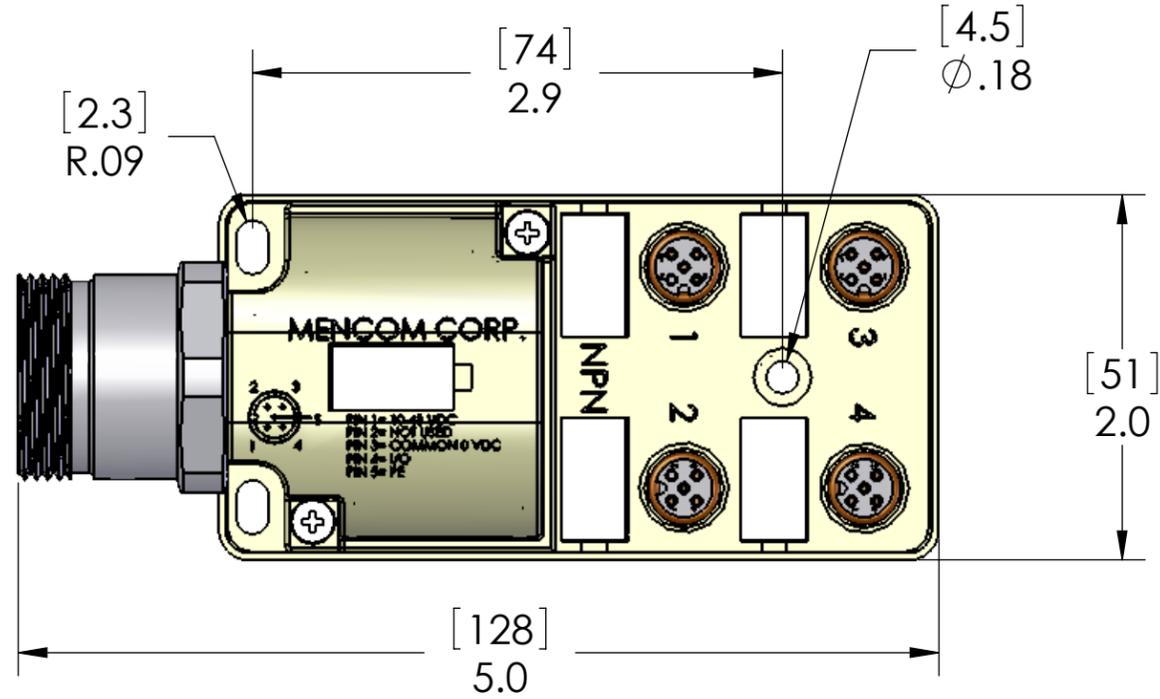


WIRING	
FUNCTION	MIN PIN
V+ (ALL PORTS PIN 1)	10
V- (ALL PORTS PIN 3)	11
GND (ALL PORTS PIN 5)	9
PORT 1 PIN 4	1
PORT 2 PIN 4	2
PORT 3 PIN 4	3
PORT 4 PIN 4	4

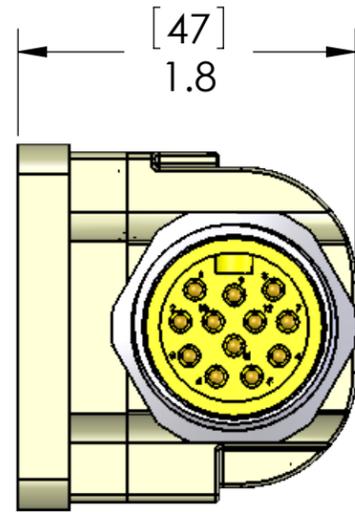

**THIS IS AN NPN BLOCK**

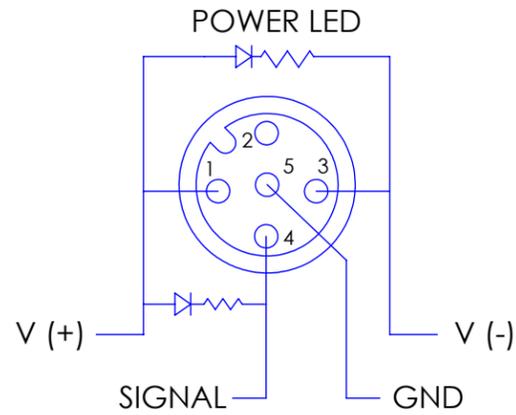

MATERIALS:	
BODY:	PBT
MARKERS:	POLYAMIDE
INSERTS:	POLYAMIDE
MIN BODY:	CLEAR ANODIZED ALUMINUM
CONTACTS:	GOLD PLATED COPPER ALLOY
O-RINGS:	NBR & FPM
RATINGS:	
VOLTS:	48VDC MAX
AMPS:	3A PER PORT, 8A PER BLOCK

**PROPRIETARY AND CONFIDENTIAL**  
 THE INFORMATION CONTAINED IN THIS DRAWING IS THE SOLE PROPERTY OF MENCORPORATION. ANY REPRODUCTION IN PART OR AS A WHOLE WITHOUT THE WRITTEN PERMISSION OF MENCORPORATION IS PROHIBITED.

UNLESS OTHERWISE SPECIFIED: DIMENSIONS ARE IN INCHES AND [MM]	DRAWN BY	ADM
	DRAWN DATE	09/22/2016
	CHECKED BY	
	CHECK DATE	
MATERIAL	COMMENTS:	
FINISH		
DO NOT SCALE DRAWING		

MENCORPORATION		
TITLE:		
SIZE	DWG. NO.	REV
<b>B</b>	JDC-44N-212-M000	<b>B</b>
SCALE: 1:1	WEIGHT:	SHEET 1 OF 1