

Overview

Steel City® fittings

01 Dependable pipe stop

Strong, thick protrusion that does not exceed thickness of EMT. Keeps forcefully inserted conduit from breaking through the opposite side of the coupling, while not interfering with the pulling of conductors

02 Heavy-duty thick steel body/glands with continuous threading

True hexagonal shape. The non-circular design has actual flats for gripping power using hand or tool force

03 Extra-thick electro-plated zinc finish

Ensures corrosion resistance while the clear chromate coating gives the fittings their quality shine and luster

04 Superior quality and design

Strict tolerances throughout fitting ensures a straight conduit run with no sagging over extreme lengths. Chamfered entry provides lead-in for conduit insertion

05 Dependable pipe stop

360° groove traveling the circumference ensures that conduit forcefully inserted won't break through to the opposite side of the fitting. Also, it does not exceed thickness of EMT and prevents interference with pulling conductors

06 Extra-large head tri-drive set screw

Accommodates Phillips, slotted and square drives

Enhanced locknut construction

Heavy-duty turned sharp teeth, double-threaded

Steel City® conduit fittings provide long-lasting service in commercial, industrial and residential construction. Our fittings are manufactured within strict tolerances to maintain consistent performance. Installers can be assured that every fitting with the Steel City® name will work every time. So when you select Steel City® Conduit Fittings, that means fewer headaches and call-backs.

Steel City® products symbolize the highest quality standards in manufacturing and innovative design, with one of the most complete offerings available. Contact an ABB distributor nearest you to select the right Steel City® product for your requirements.



Advantages of Steel City® conduit fittings


Compression fittings



01



02

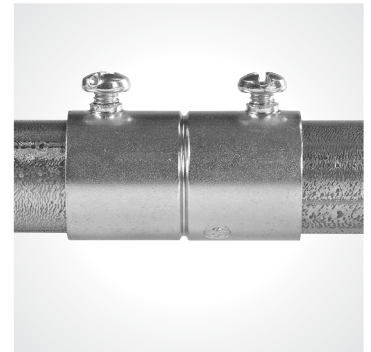

03

Couplings and connectors



04



05



06

Overview

Here's how the Steel City® catalog number system works

Easy-to-identify alphabetical prefixes:

BG – Bushings, grounding
BI – Bushings, insulated
BL – Blanks
BR – Rigid spacer
BS – Box spacer
BT – Thinwall spacer
BU – Bushings
CB – Clamp back
CP – Cable protector
EK – 3-piece coupling
FA – Fire alarm
GA – Ground clamp (armored ground wire)
GC – Ground clamp
H – Hub
HA – Heavywall adapter
HC – Heavywall connector
HK – Heavywall coupling
HL – Heavywall elbow
HO – Heavywall offset
HS – Heavywall strap
LG – Locknut, grounding
LN – Locknut
LT – Liquidtight
NC – Non-metallic sheathed cable connector
NS – Non-metallic sheathed cable strap
RB – Reducing bushings
RT – Raintight
SH – Service entrance fitting
SL – Service Ells
SR – Sealing rings
SS – Stainless steel
LS – Locknut, sealing
TC – Thinwall connectors
TK – Thinwall couplings
TL – Thinwall elbow
TO – Thinwall offset
TS – Thinwall strap
TX – Thinwall to flexible metallic conduit fitting
UC – Utility connector
RB – Reducing bushings

USA – Made in USA
WA – Washer
XC – Armored cable or flexible metallic conduit connector
XX – Armored cable or flexible metallic conduit coupling

1st digit – material

1 = Steel
2 = Die cast
3 = Combination steel and die cast
4 = Malleable
5 = Plastic
6 = Aluminum
7 = Steel insulated
8 = Die Cast insulated
9 = Malleable insulated

2nd digit – method

1 = Compression
2 = Set screw
3 = Other

3rd/4th digit – size

0 = $\frac{3}{8}$ "
1 = $\frac{1}{2}$ "
2 = $\frac{3}{4}$ "
3 = 1"
4 = $1\frac{1}{4}$ "
5 = $1\frac{1}{2}$ "
6 = 2"
7 = $2\frac{1}{2}$ "
8 = 3"
9 = $3\frac{1}{2}$ "
10 = 4"
11 = 5"
12 = 6"


A few examples of the three-digit identification system for thinwall fittings are:

TK-111A: = $\frac{1}{2}$ " steel, compression-type coupling
TC-714A: = $1\frac{1}{4}$ " steel, compression-type coupling
TC-822SC: = $\frac{3}{4}$ " die-cast, insulated, set-screw type connector



Electrical metallic tubing (EMT) fittings

EMT connectors, one-hole snap straps, two-hole EMT straps, space caps & nail straps

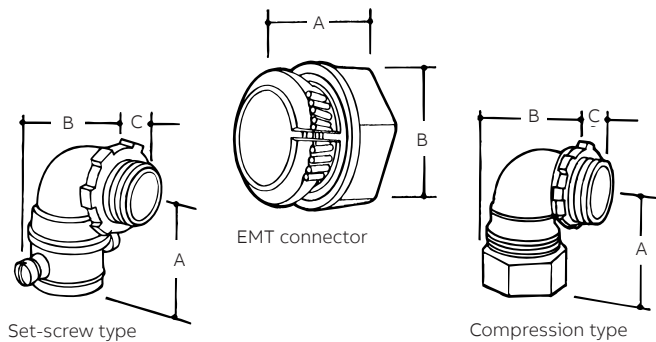


EMT connectors – die-cast zinc

Cat. No.	Trade Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
Two-Piece Type				
TC-201-SC	1/2	0.68	1.05	1,000
UL File No. E16592.				

UL File No. E16592.


Cat. No.	Trade Type (in.)	Size (in.)	Dimensions (in.)			Std. Ctn.
			A	B	C	
90° Angle						
TC921	Set-screw type	1/2	1.27	1.15	.45	200
TC-911-SC	Compression type	1/2	1.37	1.15	.45	200
TC-912-SC	Compression type	3/4	1.86	.95	.52	200

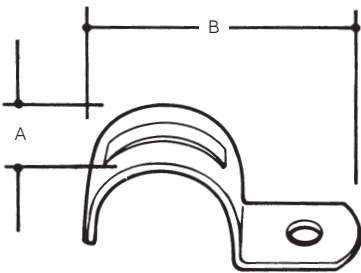

One-hole snap straps – steel – zinc plated

	Conduit Size	Dimensions (in.)		Stainless Steel	Regular
Cat. No.	(in.)	A	B	Std. Ctn.	Std.Ctn.
EMT to flex compression to screw-in type – die-cast zinc					
TS 101	1/2	0.57	1.79	25	100
TS-102	3/4	0.62	1.96	25	50
TS-103	1	0.75	2.25	25	50
TS-104	1 1/4	0.88	2.85	10	25
TS-105	1 1/2	0.99	3.16	5	20
TS-106	2	1.10	3.93	5	10
HS-107	2 1/2	1.28	5.00	5	25
HS-108	3	1.28	5.55	5	25
HS-109	3 1/2	1.28	6.37	5	10
HS-110	4	1.28	6.87	5	10


Add SS suffix to part number for stainless steel.

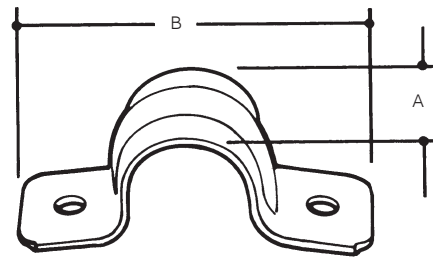

Two-hole EMT straps – steel – zinc plated – malleable insulated

Cat. No.	Conduit Size (in.)	Dimensions (in.)		Stainless Steel Std. Ctn.	Regular Std.Ctn.
		A	B		
TS-901	1/2	0.56	2.20	25	250
TS-902	3/4	0.62	2.67	25	200
TS-903	1	0.68	2.97	25	100
TS-904	1 1/4	0.75	3.67	10	50
TS-905	1 1/2	0.88	4.22	5	5
TS-906	2	1.00	4.91	5	25


Add SS suffix to part number for stainless steel.



Space caps – plastic

Cat. No.	Conduit Size (in.)	Dimensions (in.)		Std. Ctn.
		A	B	
BT-501	1/2	2 15/32	1 33/64	100
BT-502	3/4	2 15/32	1 47/64	100
BT-503	1	2 15/32	1 31/32	100
BT-504	1 1/4	2 15/32	2 31/64	100
BT-505	1 1/2	2 15/32	3 1/32	100

UL File No. E16592.



Nail straps – steel – zinc plated

Cat. No.	Rigid/ MC Size	EMT Size (in.)	Flex Size (in.)	Dimensions (in.)		Std. Ctn.
				A	B	
N-101-SC	–	1/2	3/8	1 15/16	1 5/64	1,000
N-102-SC	1/2	3/4	1/2	2 3/16	1 17/32	1,000
N-103-SC	3/4	1	–	2 3/8	1 15/32	1,000

Index

Order code classification

Part No.	GID Code	Page No.
RC-3	7TAA015610R0025	31
RC-3-1/2	7TAA015610R0026	31
RC-3/4	7TAA015610R0027	31
RC-3/8	7TAA015610R0028	31
RC-4-SC	7TAA015610R0029	31
RCS-1	7TAA015630R0000	31
RCS-1-1/2	7TAA015630R0001	31
RCS-1-1/4	7TAA015630R0002	31
RCS-1/2	7TAA015630R0003	31
RCS-2	7TAA015630R0004	31
RCS-3/4	7TAA015630R0005	31
SB1216-SC	7TAA011890R0146	21
SC1000	7TAA010890R0007	29
SC2001	7TAA010890R0008	29
SH-101	7TAA011020R0012	29
SH-102	7TAA011010R0010	29
SH-103	7TAA011010R0011	29
SH-104	7TAA011010R0012	29
SH-105	7TAA011010R0013	29
SH-106	7TAA011000R0002	29
SH-107	7TAA011000R0003	29
SH-108	7TAA011000R0004	29
SH-109	7TAA011010R0014	29
SH-110	7TAA011000R0005	29
SPLN-107	7TAA117180R0000	16
SPLN-108	7TAA117180R0001	16
SPLN-109	7TAA117180R0002	16
SPLN-110	7TAA117180R0003	16
SR-101	7TAA115100R0002	35
SR-102	7TAA115100R0003	35
SR-103	7TAA115100R0004	35
SR-104	7TAA115100R0005	35
SR-105	7TAA115100R0006	35
SR-106	7TAA115100R0007	35
T-102	7TAA010580R0002	27
TC-102-SC	7TAA116480R0001	8
TC-201-SC	7TAA010620R0000	11
TC-211-SC	7TAA010600R0000	8
TC-2110-SC	7TAA010710R0000	8
TC-212-SC	7TAA010600R0001	8
TC-213-SC	7TAA010610R0000	8
TC-214-SC	7TAA010610R0003	8
TC-215-SC	7TAA010610R0001	8
TC-216-SC	7TAA010610R0002	8
TC-217-SC	7TAA010620R0002	8
TC-218-SC	7TAA010620R0003	8
TC-219-SC	7TAA010620R0004	8
TC-221-SC	7TAA010720R0000	9
TC-2210-SC	7TAA010740R0000	9

Part No.	GID Code	Page No.
TC-222-SC	7TAA010720R0001	9
TC-223-SC	7TAA010730R0000	9
TC-224-SC	7TAA010730R0001	9
TC-225-SC	7TAA010730R0002	9
TC-226-SC	7TAA010730R0003	9
TC-227-SC	7TAA010740R0001	9
TC-228-SC	7TAA010740R0002	9
TC-229-SC	7TAA010740R0003	9
TC-701-SC	7TAA116480R0002	8
TC-702-SC	7TAA116480R0003	8
TC-721A	7TAA116030R0000	6
TC-723A	7TAA116040R0000	6
TC-811-SC	7TAA010630R0000	8
TC-8110-SC	7TAA010650R0000	8
TC-812-SC	7TAA010630R0001	8
TC-813-SC	7TAA010640R0000	8
TC-814-SC	7TAA010640R0001	8
TC-815-SC	7TAA010640R0002	8
TC-816-SC	7TAA010640R0003	8
TC-817-SC	7TAA010650R0001	8
TC-818-SC	7TAA010650R0002	8
TC-819-SC	7TAA010650R0003	8
TC-821-SC	7TAA010750R0000	9
TC-8210-SC	7TAA010770R0000	9
TC-822-SC	7TAA010750R0001	9
TC-823-SC	7TAA010760R0000	9
TC-824-SC	7TAA010760R0001	9
TC-825-SC	7TAA010760R0002	9
TC-826-SC	7TAA010760R0003	9
TC-827-SC	7TAA010770R0001	9
TC-828-SC	7TAA010980R0354	9
TC-829-SC	7TAA010980R0355	9
TC-911-SC	7TAA010970R0000	11
TC-912-SC	7TAA010970R0001	11
TC1110ART	7TAA116270R0000	7
TC111A-RT	7TAA116260R0000	7
TC112A-RT	7TAA116260R0001	7
TC113A-RT	7TAA116260R0002	7
TC117ART	7TAA116270R0001	7
TC118ART	7TAA116270R0002	7
TC119ART	7TAA116270R0003	7
TC123A-FA	7TAA116360R0002	6
TC7110ART	7TAA116270R0004	7
TC717ART	7TAA116270R0005	7
TC718ART	7TAA116270R0006	7
TC719ART	7TAA116270R0007	7
TC723A-FA	7TAA116360R0004	6
TK-211-SC	7TAA010660R0000	9
TK-2110-SC	7TAA010680R0000	9

Part No.	GID Code	Page No.
TK-212-SC	7TAA010660R0001	9
TK-213-SC	7TAA010670R0000	9
TK-214-SC	7TAA010670R0001	9
TK-215-SC	7TAA010670R0002	9
TK-216-SC	7TAA010670R0003	9
TK-217-SC	7TAA010680R0001	9
TK-218-SC	7TAA010680R0002	9
TK-219-SC	7TAA010680R0003	9
TK-221	7TAA010690R0000	10
TK-2210	7TAA010710R0000	10
TK-222	7TAA010690R0001	10
TK-223	7TAA010700R0000	10
TK-224	7TAA010700R0001	10
TK-225	7TAA010700R0002	10
TK-226A	7TAA010700R0003	10
TK-227	7TAA010710R0001	10
TK-228	7TAA010710R0002	10
TK-229	7TAA010710R0003	10
TK111A-RT	7TAA116260R0012	7
TK112A-RT	7TAA116260R0013	7
TK113A-RT	7TAA116260R0014	7
TK122A-FA	7TAA116360R0006	6
TK123A-FA	7TAA116360R0007	6
TL-201	7TAA010360R0003	10
TL-202-SC	7TAA010360R0004	10
TL-203	7TAA010370R0006	10
TL-204	7TAA010370R0007	10
TL-211	7TAA010370R0003	10
TL-212	7TAA010370R0008	10
TL-291	7TAA010370R0004	9
TL-292	7TAA010370R0005	9
TO-211SC	7TAA010190R0000	9
TO-223	7TAA010190R0003	9
TS-102	7TAA116300R0001	11
TS-103	7TAA116300R0002	11
TS-104	7TAA116310R0000	11
TS-105	7TAA116310R0001	11
TS-106	7TAA116310R0002	11
TS-901	7TAA116320R0000	11
TS-902	7TAA116320R0001	11
TS-903	7TAA116320R0002	11
TS-904	7TAA116330R0000	11
TS-905	7TAA116330R0001	11
TS-906	7TAA116330R0002	11
TX-201	7TAA010130R0004	10
TX-202	7TAA010130R0005	10
TX-212	7TAA010130R0008	10
TX-220	7TAA010130R0003	10
TX-221	7TAA010120R0000	10